

350W 6 Zones Integrated Mixer Amplifier Paging Mic Connectivity



DESCRIPTION

The NVS-PA0018006CP is a professional intelligent address system suitable for household, factory, school, hospital and other commercial applications. This amplifier has strong power, wide frequency band, low noise, high fidelity and quality. The user can connect several loudspeakers as there are constant voltage output of six zones and constant impedance output. It has better safety performance with excellent and dependable overload, short-circuit, and overheat protection

FEATURES


- ⊙ Two channels of line input and four channels of microphone
- ⊙ Separate control of volume with 6 partitions selector
- ⊙ Built-in chime and alarm generator
- ⊙ Output short-circuit protection
- ⊙ Priority level function
- ⊙ Fan on the rear panel to prevent overheating of the machine
- ⊙ Supports MP3,WMA,WAV and ACC

Specifications	
Model	NVS-PA0018006CP
Frequency response	MIC: 100Hz-12kHz (±3dB) LINE: 80Hz-16kHz (±3dB) TEL: 100Hz-12kHz (±3dB)
Microphone input sensitivity	3.0mV(±0.5mV), 1kHz/unbalanced 5.0mV(±0.5mV), 1kHz/balanced
Line input sensitivity	300mV(±50mV), 1kHz/unbalanced
EMC input sensitivity	300mV(±50mV), 1kHz/unbalanced
Telephone sound source input sensitivity	775mV(±50mV), 1kHz/unbalanced
Rated power	350W
Output voltage	70V, 100V
Output impedance	4-16Ω (balanced, not grounded)
Signal to noise ratio	MIC: ≥55dB LINE: ≥75dB TEL: ≥65dB
Total harmonic distortion	≤ 1% (1kHz, normal working condition)
Power consumption	800W
Weight	22.1kg
Dimension	483×413×132mm

Analog PA


350W 6 Zones Integrated Mixer Amplifier Paging Mic Connectivity

FRONT PANEL

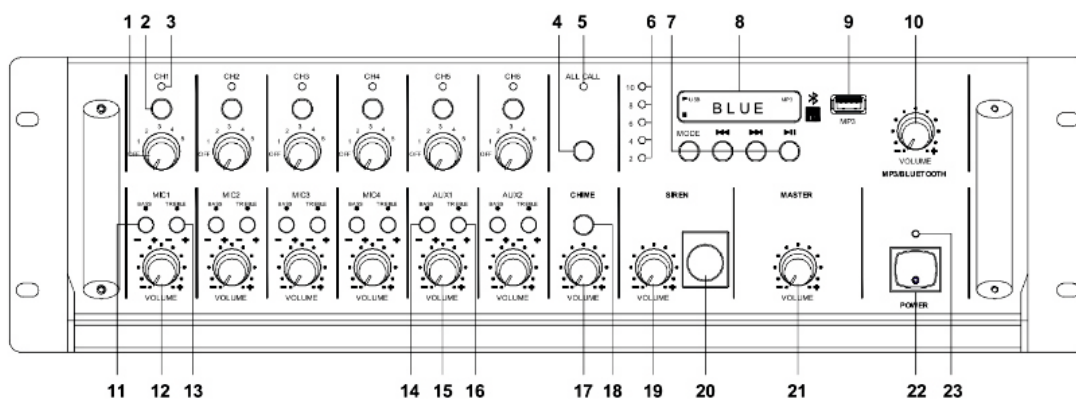

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Partition CH1 volume adjustment knob 2. Partition CH1 switching key 3. Partition CH1 on indicator 4. All partitions control key 5. All partitions indicator 6. Output level indicator lamp 7. MP3/Bluetooth player control key 8. Display screen 9. USB Port 10. MP3 volume adjustment knob 11. Microphone MIC1 bass adjustment knob BASS 12. Microphone MIC1 volume adjustment knob | <ol style="list-style-type: none"> 13. Microphone MIC1 treble adjustment knob 14. Auxiliary input AUX1 bass adjustment knob 15. Auxiliary input AUX1 volume adjustment knob 16. Auxiliary input AUX1 treble adjustment knob 17. Chime volume adjustment knob 18. Channel chime on/off switch 19. Siren volume adjustment knob 20. Siren on-off button 21. Master volume adjustment knob 22. Power switch 23. Power indicator |
|--|---|

REAR PANEL

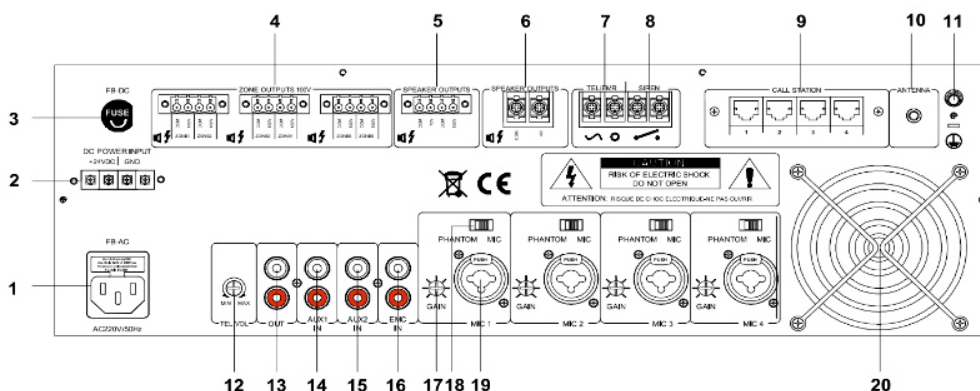

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Power supply interface 2. 24V connection terminal 3. Fuse holder 4. Output terminal (ZONE 1-6) 5. Output terminal 6. 4-16Ω output 7. TEL IN 8. Siren short circuit trigger terminal 9. Remote paging control interface 10. Bluetooth Antenna | <ol style="list-style-type: none"> 11. Grounding terminal 12. Telephone volume control knob 13. Auxiliary output interface 14. Auxiliary input socket 15. Auxiliary input socket 16. Emergency input socket(EMC) 17. MIC1 gain adjustment control knob 18. +48V phantom power control switch 19. Microphone MIC1 input socket 20. Cooling fan |
|--|---|

350W 6 Zones Integrated Mixer Amplifier Paging Mic Connectivity

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0018006CP	350W 6 Zones Integrated Mixer Amplifier Paging Mic Connectivity	01

ACCESSORIES INFORMATION

Description	Standard Quantity
1500MM double-modulator audio cable	01
4P Green Plug	04
5x19 semi-countersunk head screw(silver)	04
Power line	01
Remote controller	04
Gaskets with machine(Black)	04
Certificate	01
Warranty Card	01
User Manual	01