

250W 6 Zones Paging and Music Mixer Amplifier with SD/USB/FM



Mixer Amplifier

DESCRIPTION

The NVS-90110256MA Mixer Amplifier is rated at 250W and 4-16 Ω speaker output are provided. There are 4 unbalanced microphones inputs and 3 aux inputs. Bass and treble controls and master volume control are provided. This amplifier can be applied to different occasions, such as supermarket, classroom, etc. Extensive protection from short-circuit, overload and high temp is ensured. Automatic cooling system ensures the extreme quite sound system.

FEATURES

- ⦿ 100V & 4-16 Ω, rated power 250W
- ⦿ Support USB / SD / FM radio, with built-in chime
- ⦿ 4 MIC inputs, Mic 1 with priority and muting function
- ⦿ 3 AUX line input & 1 AUX line output for power extension
- ⦿ Each AUX & Mic input with individual volume

Specifications	
Model	NVS-90110256MA
Rated output	250W
Frequency Response	80Hz - 16kHz (±3dB)
Input Sensitivity	MIC: 3mV (±0.5mV) LINE: 300mV (±50mV)
Total Harmonic Distortion	<1% (1kHz, 1/3 rated power)
Signal to Noise Ratio	MIC: >71dB LINE: >85dB
Rated Output Voltage/Impedance	100V/ 4-16 Ω,
Protection	DC voltage, Overload, Short-circuit
Power Supply	AC 220V-240V/ 50Hz-60Hz
Power Consumption	500W
Weight	14Kg
Dimension	418×338×88mm


250W 6 Zones Paging and Music Mixer Amplifier with SD/USB/FM

FRONT PANEL



- | | |
|--|------------------------------------|
| 1. Power Switch | 10. Chime Button |
| 2. LED Power Indicator | 11. MP3 SD Jack |
| 3. Bass Adjustment Button | 12. MP3/tuner Select Key |
| 4. Treble Adjustment Button | 13. MP3/tuner Status Operation Key |
| 5. Line Input Volume Adjustment Button | 14. MP3/tuner Status Operation Key |
| 6. MIC Input Volume Adjustment Button | 15. MP3/tuner Status Operation Key |
| 7. MIC 1 Priority Input Jack | 16. MP3 USB Jack |
| 8. Zone Volume Adjustment Button (1-6) | 17. MP3/tuner status display |
| 9. Zone Level Indicator | 18. Five-unit LED Level Meter |

REAR PANEL

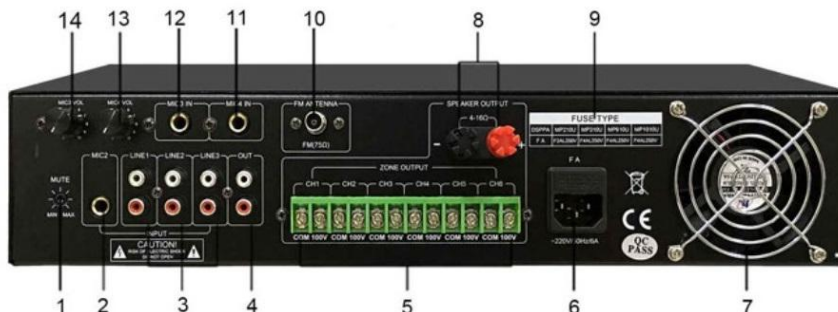

- | | |
|---|------------------------------|
| 1. Mute Control Button | 8. Speaker Output Terminal |
| 2. MIC 2 Input Jack | 9. AC Power Fuse |
| 3. Line Input Jack 1,2,3 | 10. FM antenna Jack |
| 4. AUX Output Jack (Link with another amplifier or recording equipment) | 11. MIC4 Input Jack |
| 5. 6-zone Output | 12. MIC3 Input Jack |
| 6. AC Power Source Insert | 13. MIC4 Input Volume Button |
| 7. Fan Exhaust Window | 14. MIC3 Input Volume Button |

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90110256MA	250W 6 Zones Paging and Music Mixer Amplifier with SD/USB/FM	01