

NVS-20240302AM

Mini Stereo Mixer Amplifier 60W



DESCRIPTION

NVS-20240302AM is a Mini type Amplifier with 2 channel output. This is a DC voltage operated device and it provides 30W output for 4Ω-16Ω Speakers. It supports USB Record function by microphone or AUX inputs. It can be control by using a remote control. This Class D Amplifier is an ideal choice for small areas, such as shops, restaurants, school and office etc.

FEATURES


- ◉ Built in MP3, USB, Bluetooth inputs
- ◉ Mini Stereo digital power Amplifier with high efficiency
- ◉ LED Display
- ◉ Aluminum alloy casing
- ◉ Digital volume control

Specifications


Model	NVS-20240302AM
Rated Power Output	2x30W
Input sensitivity	LINE : 310mV, MIC : 10mV
Signal to noise ratio (S/N Ratio)	2mV
Harmonic Distortion	<1%
Frequency response (Frequency Response)	20Hz~20kHz
Operating Voltage	DC 12V~24V
Power Consumption	90W
Dimension (LxWxH)	180×163×55mm
Weight	0.8Kg

Mini Stereo Mixer Amplifier 60W

FRONT PANEL

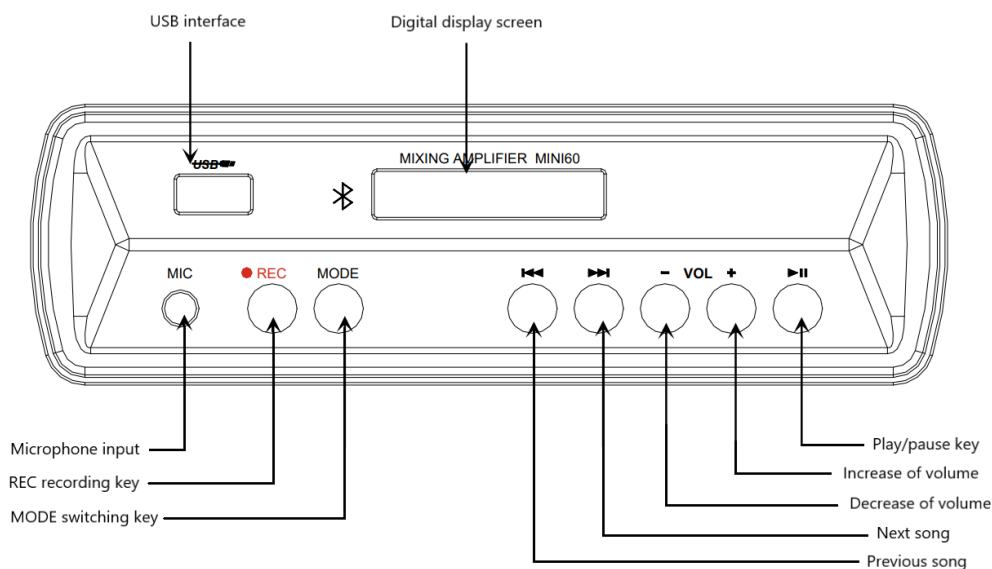

REAR PANEL

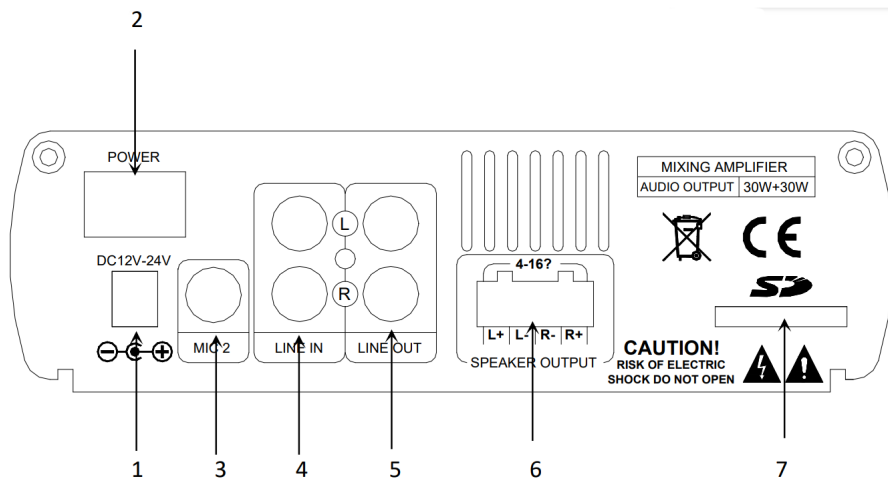

1. Power input interface
2. Power supply switch
3. 6.35 MIC input interface
4. LINE IN auxiliary output interface
5. LINE OUT auxiliary output interface
6. Speaker output
7. SD interface

NVS-20240302AM



Mini Stereo Mixer Amplifier 60W

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-20240302AM	Mini Stereo Mixer Amplifier 60W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
Power Adapter 220V/4.5A	1
Power Cord	1
Remote Control	1
Phoenix plug with 4P	1
Mounting Screws	3
User Manual	1