


# 32CH EMBEDDED NETWORK VIDEO RECORDER

**ENR-04032-N-FK**

## FEATURES

32 Channel Input
Support H.265+, H.265, H.264 Video Formats
4 SATA HDDs
HDMI and VGA Simultaneous Output
Support RAID (0/1/5/6/10)
ONVIF Profile (S, G, T, Q)

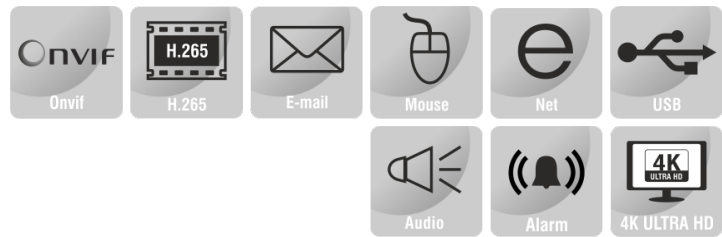

## SPECIFICATION

MODEL	Model No.	ENR-04032-N-FK
	Type	32CH EMBEDDED NETWORK VIDEO RECORDER
VIDEO & AUDIO	Video Input	32-Ch
	Incoming Bandwidth	320 Mbps
	Outgoing Bandwidth	320 Mbps
	HDMI / VGA Output	HDMI 2: 3840×2160, 1920×1080, 1440×900, 1280×1024 VGA /HDMI 1: 1920×1080, 1440×900, 1280×1024
	Audio Input / Output	1 / 1
	Two-way Audio	Supported
	Multi-screen Display	1st Screen: 1/4/8/9/16/32/36 2nd Screen: 1/4/8/9/16
	Video Encryption	Supported
	OSD	Channel Name, Date
DECODING	Video Compression	H.265+, H.265, H.264
	Audio Compression	G.711A/G.711U
	Video Bit Rate	CBR, VBR
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P/D1
	Recording Mode	Continuous, Manual, Event(Pre/Post, Motion etc.), Schedule
	Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
	Decoding Capability	1x12MP, 4x8MP, 8x4MP, 16x1080P, 32x720P
	Fisheye Camera	Supported
	De-warping	Supported

None

★Product specification and availability are subject to change without notice.

# 32CH EMBEDDED NETWORK VIDEO RECORDER

## ENR-04032-N-FK

<b>MODEL</b>	<b>Model No.</b>	<b>ENR-04032-N-FK</b>
	<b>Type</b>	32CH EMBEDDED NETWORK VIDEO RECORDER
<b>MONITORING</b>	Synchronous Playback	16/9/4/1
	Live View Functions	Snapshot, Record, Digital Zoom, Record, PTZ toolbar, Volume adjustment, Image Setting
	Playback functions	Sync playback, Play, Pause, Stop, Fast play, Slow play, Full Screen, Backup selection, Snapshot, Search by events, Picture grid
	Search Mode	Time/Date, Alarm, Picture grid, Event
	Backup Mode	USB, Network, e-SATA
	Export Video Format	MP4
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPV4, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, FTP, UPnP, SMTP, SNMP, P2P, IP Filter, 802.1X, 3G/4G
	Compatibility	ONVIF Profile (S, G, T, Q), SDK/CGI
	Network	2xRJ45 (10/100/1000 Mbps) Self Adaptive Ethernet Port
	Serial Interface	1xRS485 & 1xRS232
	USB Interface	2xUSB 2.0, 1xUSB 3.0
	Alarm Interface	16 Input / 4 Output
<b>SMART</b>	Alarm Management	Input & Output event, Alarm I/O error, IP Conflict, Hard disk full, No hard disk, Hard disk R/W error, HDD SMART check error, Abnormal recording, Hot spare error & Array error, Motion detection, Tampering (Masking), Smart detection, Video loss
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Analytics	Loitering, Multi Loitering, Abandoned object (Object Left), Missing object (Object Lost), People Counting, Wrong Way Detection, Abnormal Speed, Illegal Parking *Compatible with analytic supported cameras
<b>STORAGE</b>	SATA	4 SATA Interfaces
	Capacity	Up to 12 TB for each HDD
	Array Type	RAID 0/1/5/6/10
	e-SATA	Supported
	ANR	Supported
	Cloud Storage	Supported
<b>GENERAL</b>	Operating System	Embedded Linux
	Remote Users	8
	Web Client	Eye Guard
	Power	AC100 ~ 240V
	Redundant Power	N/A
	Power Consumption (without HDD)	≤ 15 W
	Working Environment	-10 °C ~ 50 °C
	Humidity	< 90% RH
	Dimension	440x368.3x70 mm
	Net Weight	4.5 kg

Dimension Unit : mm



### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-04032-N-FK	32Ch Embedded Network Video Recorder with 4 HDD Bays Supports 4K Cameras, HDMI, VGA and ONVIF	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENR-04032-N-FK	Carton Box	-	-

None

★Product specification and availability are subject to change without notice.