
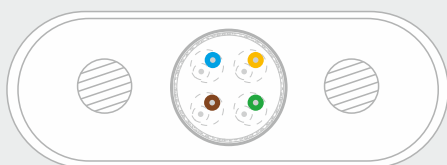


CATEGORY 6A S/FTP 4 PAIR ELEVATOR TRAVELLING CABLE

Norden flat elevator cable is ideal for connecting IP cameras inside elevators. The elevator traveling Cat 6A cable exceeds Category 6A/Class EA specs.

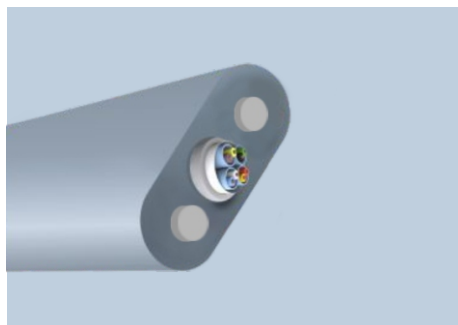

COMPLIANCE

EN 50214
Flame Propagation - IEC/EN 60332-1-2

PRODUCT CLASSIFICATION

Product Sequence	Premium
Product Type	Twisted Pair Cable

MATERIAL CONSTRUCTION & DESIGN

Conductor Material	Tinned Copper
Conductor Size	7/0.16, 26 AWG
Conductor Construction	Stranded
Insulation Material	Foam PE
Individual Pair Shield:	Al/PETP foil
Support members:	None
Overall Shield:	65% TC braid shield
Inner Jacket Outer Dia	5.8mm
Outer Jacket:	PVC (Elastic material for elevator)
Overall Dimension	17.0±1.5mmx8.7±0.5mm
Galvanized steel rope Dia.	2.0mm [2 Nos.]
Total Number of pairs	4
Outer Jacket Color	Grey

ELECTRICAL & MECHANICAL CHARACTERISTICS

Free Suspension length	48 meters max.
Travel speed	4 m/s max.
Shaft Height	80 m
Operating Temp.	-15°C to +75°C
Tensile strength	≥10.0N/mm ²
Sheath elongation	≥300%
Rated Voltage	100V

ORDERING INFORMATION

Part Number	Description
105-1000T504X	Category 6A S/FTP 4 Pair Elevator Travelling Cable