

2MP MOTORIZED BULLET CAMERA



ENC-HBU5M-50R-70

FEATURES

2.7-12 mm Motorized Lens


Smart IR up to 50m

ONVIF Profile (S, G, T)

Triple Stream

Audio and Alarm Support

PoE, IP67, IK10

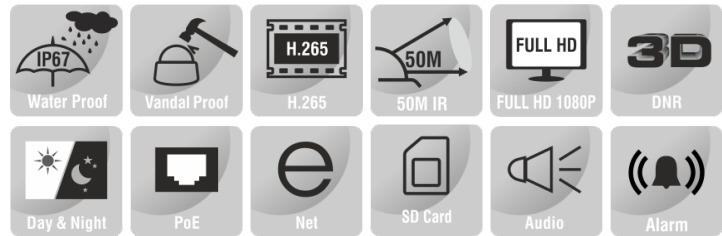

SPECIFICATION

MODEL		ENC-HBU5M-50R-70
	Model No.	ENC-HBU5M-50R-70
	Type	2MP MOTORIZED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized
	Focal Length	2.7-12 mm
	Iris	Auto Iris
	Angle of View (H)	105° ~ 32°
	Angle Adjustment	Pan 0~360°, Tilt 0~90°, Rotate 0~360°
	Aperture	F1.3
	Shutter	1s ~ 1/100,000s
	Min. Illumination	Color: 0.001 lux @ F1.2, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	55 dB
	Defog	Smart Defog
	WDR	120 dB
Smart IR	Up to 50 m	

None

★Product specification and availability are subject to change without notice.

2MP MOTORIZED BULLET CAMERA



ENC-HBU5M-50R-70

MODEL	Model No.	ENC-HBU5M-50R-70
	Type	2MP MOTORIZED BULLET CAMERA
VIDEO	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264
	Frame Rate	Main Stream: 1920x1080, 1280x720 @ 50/60fps Sub Stream: D1, VGA, 640x360, CIF/QVGA @ 25/30fps Third Stream: VGA, CIF, QVGA @ 25/30fps
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Contrast, Saturation, Sharpness, Brightness
	Mirror	Normal/Horizontal/Vertical/ Horizontal +Vertical
	White Balance	Auto, Day/Night, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Supported
	ROI	Up to 8 regions
	Privacy Mask	Supported
AUDIO	Audio Compression	G.711, RAW_PCM
	Audio Bit Rate	8 kbps, 16 kbps, 64 kbps
	Audio I/O	1/1
SMART	Behavior Detection	Intrusion (Perimeter), Single & Double Virtual Fences
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Abnormal Speed, Converse, Illegal Parking, Signal Bad
	Alarm Management	Motion Detection, Pre/Post Alarm Recording, Disk Alarm (Full), Network disconnection Alarm, Day-Night Switch Alarm, Input & Output Alarm, Alarm Recording/Snapshot
INTERFACE	Protocols	TCP/IP, UDP, IPv4/IPv6, HTTP, HTTPS, FTP, DHCP, DNS, RTP/ RTCP, RTSP, PPPoE, NTP, UPnP, SMTP, (SSL/TLS), 802.1X, Unicast, ARP, SNMP
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm Interface	1/1
	RS485	Supported
	CVBS	Supported
	Edge Storage	MicroSD card slot, up to 128 GB
	ANR	Supported
	Max. User Access	10
	Web Client	EyeGuard
GENERAL	Power Supply	12V DC / PoE (IEEE 802.3af)
	Max. Power Consumption	10.5W
	Working Temperature	-40 °C ~ 60 °C
	Working Humidity	<90% RH
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Reset Button	Supported
	Dimensions	φ110 × 375.5 mm
Net Weight	1.68 Kg	

None

★Product specification and availability are subject to change without notice.


2MP MOTORIZED BULLET CAMERA



ENC-HBU5M-50R-70

MODEL	Model No.	ENC-HBU5M-50R-70
	Type	2MP MOTORIZED BULLET CAMERA

Dimension Unit : mm

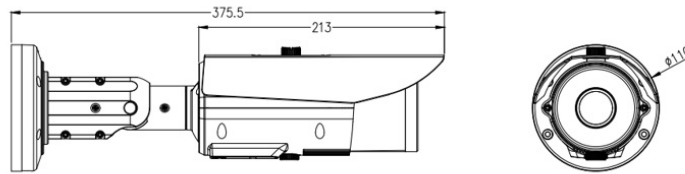

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5M-50R-70	2MP 60FPS Lowlight IP H.265 Bullet Camera with 2.7 to 12mm Motorized Lens, PoE, SD Card Slot, WDR, Smart Analytics and 50m IR Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU5M-50R-70	Carton Box	-	-

None

★Product specification and availability are subject to change without notice.