


# IP BOX CAMERA



**ENC-HBL50-00R-43**

## FEATURES

2MP Resolution  
 ONVIF Profile (S, G, T)  
 Triple Stream  
 Audio and Alarm Support  
 PoE

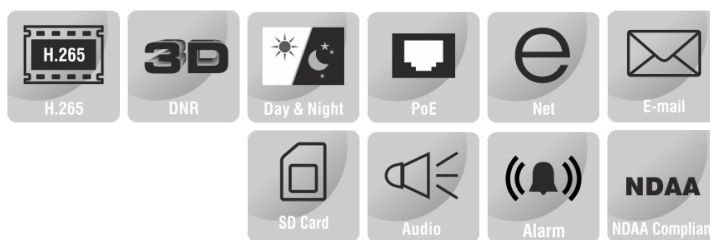

## SPECIFICATION

<b>MODEL</b>	Model No.	<b>ENC-HBL50-00R-43</b>
	Type	IP BOX CAMERA
<b>CAMERA</b>	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	C / CS Mount
	Iris	DC-Iris (Optional P-Iris)
	Shutter	1s ~ 1/100,000s Auto/Manual
	Min. Illumination	Color: 0.0005 lux @ F1.2, BW: 0.0001 lux @ F1.2, 0 lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Noise Reduction	2D/3D DNR
	S/N Ratio	>52 dB
	Defog	Digital Defog
WDR	120 dB	
<b>VIDEO</b>	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080) @ 60fps Sub Stream: (1280x720) @ 60fps Third Stream: (720x576) @ 60fps
	Video Bit Rate	128 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 Regions
	ROI	Up to 8 Regions
	Privacy Mask	Up to 4 Regions

★Product specification and availability are subject to change without notice.


# IP BOX CAMERA



## ENC-HBL50-00R-43

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HBL50-00R-43</b>
	Type	IP BOX CAMERA
<b>AUDIO</b>	Audio Compression	G.711U, G.711A
	Audio Bit Rate	64 kbps
	Audio I/O	1/1
	Two-way Audio	Supported
<b>SMART</b>	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Region Entrance/Exit Detection
	Basic Detection	Motion detection, Audio detection, Tampering alarm
	Statistical Analysis	People Counting
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Audio Detection
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, ICMP, IGMP, RTP, RTCP, RTSP, DHCP, NTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, 802.1x, QoS, SNMP, SSL/TLS
	Security	User Authentication, HTTPS Encryption, RTSP Authentication, Digest Authentication (RTSP/HTTP/ONVIF), TLS 1.2, WSSE (ONVIF)
	Compatibility	ONVIF Profile (S, G, T), SDK / API
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	2/1
	RS485	Supported
	BNC	Supported
	Edge Storage	Built-in Micro SD card slot, up to 256 GB
	Max User Access	32
Client Application	NordenVMS	
<b>GENERAL</b>	Power Supply	12V DC / 24V AC, PoE (IEEE 802.3af)
	Max. Power Consumption	7 W
	Working Temperature	-40 °C ~ 70 °C
	Working Humidity	≤95% RH
	Surge Protection	TVS6000V
	Reset Button	Supported
	Dimensions	152 x 71 x 65 mm
Net Weight	0.38 kg	

Dimension Unit : mm

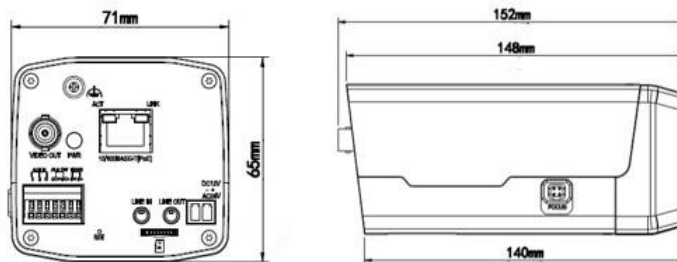

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBL50-00R-43	IP Box Camera -2MP 60FPS Lowlight H.265 IP Low light Box camera with CS mount Lens interface, POE, WDR, SD card Slot and Smart Analytics support	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBL50-00R-43	Carton Box	-	-

★Product specification and availability are subject to change without notice.