

2MP STARLIGHT IR IP H.265 FIXED DOME CAMERA



ENC-HDO5F-00R-94

FEATURES

Starlight Illumination

4mm Fixed Lens

ONVIF Profile (S/T/G)

Triple Stream

People Counting support

POE, IP66



SPECIFICATION

MODEL		ENC-HDO5F-00R-94
	Model No.	ENC-HDO5F-00R-94
	Type	2MP Starlight IR IP H.265 fixed Dome Camera
CAMERA	Image Sensor	1/2.8" CMOS 2.0 MegaPixel
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	4mm
	Iris	Fixed
	Lens Mount	M12
	Angle of View (H)	87.4°
	Angle of View (V)	46.2°
	Aperture Range	F1.6
	Shutter	1s to 1/100,000s
	Min. Illumination	Color: 0.002Lux@ (F1.6, ACG ON)
	AGC	Auto/Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	55dB
	Defog	Supported
	WDR	120dB
	IR Distance	N/A
IR Type	Smart IR	
Wavelength	850nm	
White LEDs	N/A	



2MP STARLIGHT IR IP H.265 FIXED DOME CAMERA



ENC-HDO5F-00R-94

MODEL	Model No.	ENC-HDO5F-00R-94
	Type	2MP Starlight IR IP H.265 fixed Dome Camera
VIDEO	Max.Resolution	1920x1080
	Video Compression	H.265+/H.265/H.264
	Main Stream	(1920x1080, 1280x720, 704x480, 640x480)@30 fps, (1920x1080, 1280x720, 704x576, 640x480)@25 fps
	Sub Stream	(704x480, 704x240, 640x360, 352x240)@30fps, (704x576, 704x288, 640x360, 352x288)@25fps
	Third Stream	(704x480, 704x240, 352x240)@30fps, (704x576, 704x288, 352x288)@25fps
	Video Bit Rate	32Kbps~16Mbps
	Bitrate Type	CBR/VBR
	Image Settings	Saturation, Brightness, Contrast,Sharpness, adjustable byclient software / web browser
	White Balance	Auto, Semi - Auto,Daylight Lamp, Warm Light Lamp, Filament Lamp, Nature Light,Lock White Balance, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Total 8 Regions
	OSD Type	16x16, 24x24, 32x32, 48x48, 64x64, adaptable size, Letters Such as Week, Date, Time
	ROI	Support 8 fixed regions of coding
Privacy Mask	Up to 8 regions	
HeatMap	N/A	
Picture Overlay	Supported	
AUDIO	Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
	Audio Bit Rate	8K~48Kbps
	Audio I/O	1/1
	Audio Voltage	Audio cable; Input: impedance 35 kΩ; amplitude 2 V [p-p]
	Built-in Mic	N/A
INTERFACE	Alarm Trigger	Event Input, Event Output, Motion Detection, Mask Alarm, Disk Full, Disk R/W Error, IP Address Conflict, MAC Address Conflict, FTP Server Exception
	Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,PPPoE,NTP,UPnP,SMTP,IGMP,802.1X,QoS,IPV4, IPV6,Multicast,ARP,UDP,SNMP,SSL,SIP,Telnet,RTMP,SFTP,NFS
	Compatibility	ONVIF Profile (S/T/G)
	Network	1 RJ45 10M/100M self adaptive Ethernet port
	WiFi	N/A
	Alarm Interface	2/1
	Alarm Voltage	Output: impedance 600 Ω; amplitude 2 V [p-p] 1/31
	RS485	Supported
	RS232	N/A
	USB	N/A
	Edge Storage	Built-in MicroSD card slot, up to 512 GB
	ANR	Supported
	Built-in Speaker	N/A
	Built in Heater	N/A
	Cable Interface	Pig Tail
	Remote Connection	≤7
	Web Client	EyeConnect
Web version	Web6	
Web Language	15	




2MP STARLIGHT IR IP H.265 FIXED DOME CAMERA



ENC-HDO5F-00R-94

MODEL		ENC-HDO5F-00R-94
Type		2MP Starlight IR IP H.265 fixed Dome Camera
GENERAL	Power Supply	DC 12V±25%/PoE
	Power Consumption	MAX: 6.5W (12V) MAX: 7W (POE)
	Working Temperature	-35~65°C
	Working Humidity	0-95%RH
	Ingress Protection	IP66
	Vandal Resistant	N/A
	Surge Protection	Supported
	Reset Button	Supported
	Dimensions (mm)-Packed	138x138x110
	Dimensions (mm)	Φ118.5x41
	Net Weight	0.32Kg
	Gross Weight	0.52kg

Dimension Unit : mm

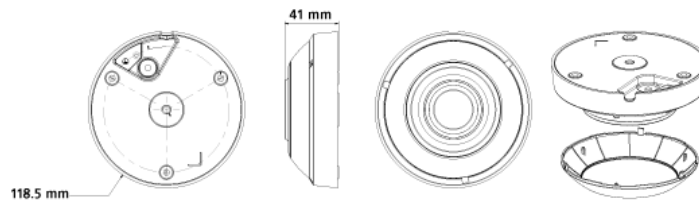

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HDO5F-00R-94	2MP Starlight IR IP H.265 Dome Camera with 4mm Fixed Lens, POE, WDR, SD card slot, and People Counting support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HDO5F-00R-94	Carton Box	0.52kg	138x138x110

