


2MP 60FPS LOWLIGHT BULLET CAMERA



ENC-HBU5M-65R-70

FEATURES

- 5 ~ 50 mm Motorized Lens
- Smart IR up to 65 m
- ONVIF Profile (S, G, T)
- Quad Stream
- Audio and Alarm Support
- PoE, IK10, IP67

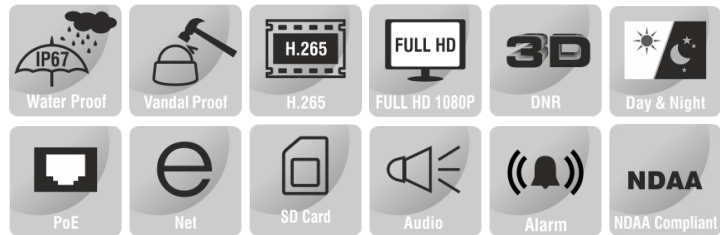

SPECIFICATION

MODEL		ENC-HBU5M-65R-70
CAMERA	Model No.	ENC-HBU5M-65R-70
	Type	2MP 60FPS LOWLIGHT BULLET CAMERA
	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized
	Focal Length	5 ~ 50 mm Lens
	Focus	Auto / Manual
	Iris	Fixed Auto Iris
	Angle of View (H)	51.2° ~ 8.7°
	Angle of View (V)	28.0° ~ 4.9°
	Angle of View (D)	58.3° ~ 9.9°
	Angle Adjustment	Bracket; Pan 0~360°, Tilt 0~90°, Rotate 0~360°
	Aperture	F2.0
	Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F2.0, B/W: 0 lux with IR
AGC	Auto / Manual	
Digital Noise Reduction	2D & 3D DNR, Auto / Manual	
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 65 m	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

2MP 60FPS LOWLIGHT BULLET CAMERA



ENC-HBU5M-65R-70

MODEL	Model No.	ENC-HBU5M-65R-70
	Type	2MP 60FPS LOWLIGHT BULLET CAMERA
DORI	Lens	5 ~ 50 mm
	Detection	88.0 ~ 530.0 m
	Observation	35.2 ~ 212.0 m
	Recognition	17.6 ~ 106.0 m
	Identification	8.8 ~ 53.0 m
VIDEO	Max. Resolution	1920x1080
	Video Compression	Enhanced (H.265,H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080, 1280x720, 704x576) @ 50/60fps Second Stream: (704x576, 640x480, 640x360, 352x288, 320x240) @ 25/30fps Third Stream: (640x480, 352x288, 320x240,) @ 25/30fps Fourth Stream: (640x480, 352x288, 320x240) @ 25/30fps (Optional)
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night(Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Supported
	ROI	Up to 8 regions
	Privacy Mask	Supported
	AUDIO	Audio Compression
Audio Bit Rate		8 kbps, 16 kbps, 64 kbps
Audio I/O		1/1
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection , People Counting, Human & Vehicle Detection, Abnormal Video & Audio Detection, Wrong Way Detection, Illegal Parking, Tampering / Masking / Scene Change, Abnormal Speed
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP , IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, Telnet, SSL/TLS1.2
	Security	TLS 128 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	SD card slot, up to 512 GB
	ANR	Supported
	Max. User	32
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC , PoE (IEEE 802.3af)
	Max. Power Consumption	≤12 W
	Working Temperature	-40 °C ~ 65 °C
	Working Humidity	≤95% RH
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	φ110 × 356.33 mm
Net Weight	1.45 Kg	


★Product specification and availability are subject to change without notice.

2MP 60FPS LOWLIGHT BULLET CAMERA



ENC-HBU5M-65R-70

Dimension Unit : mm

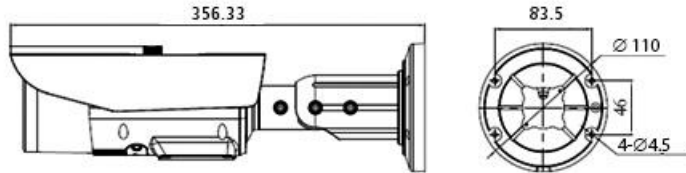

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5M-65R-70	2MP 60FPS Lowlight IP H.265 Bullet Camera with 5 to 50mm Motorized Lens, PoE, SD Card Slot, WDR, Smart Analytics and 65m IR Support	1
ENB-BCUJ66	Junction Box for Norden Bullet Camera	1
ENB-BCUV67	Pole Mount Bracket for Norden Bullet Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU5M-65R-70	Carton Box	-	-

★Product specification and availability are subject to change without notice.