


2MP BOX CAMERA



ENC-HBL50-00R-70

FEATURES

2MP Resolution
 True WDR
 ONVIF Profile (S, G, T)
 Quad Stream
 Auto Back Focus
 Audio and Alarm Support
 PoE

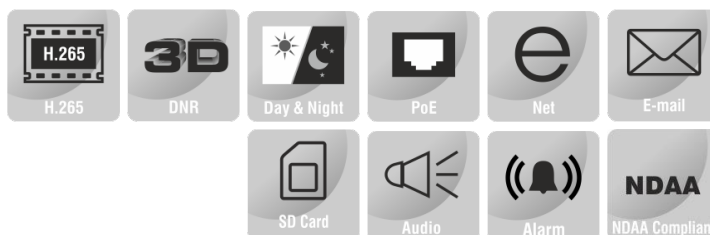

SPECIFICATION

MODEL	Model No.	ENC-HBL50-00R-70
	Type	2MP BOX CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	CS Mount
	Iris	DC Iris
	Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0.002 lux, 0 Lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Zoom	16x
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
Defog	Smart Defog	
WDR	120 dB	
VIDEO	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080, 1280x720) @ 50/60fps Second Stream: (1920x1080, 1280x720, D1) @ 25/30fps Third Stream: (VGA, CIF, QVGA, QCIF) @ 25/30fps Fourth Stream: (VGA, CIF, QVGA, QCIF) @ 25/30fps **Fourth Stream Supported in IE only
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Daynight, Tungsten, Manual
	Corridor Mode	Supported
	BLC	Supported
	OSD	Title, Week, Date, Time, Text with different colors and adaptable sizes
	ROI	Up to 8 Regions
Privacy Mask	Up to 4 Regions	

★Product specification and availability are subject to change without notice.


2MP BOX CAMERA



ENC-HBL50-00R-70

MODEL	Model No.	ENC-HBL50-00R-70
	Type	2MP BOX CAMERA
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	8 kbps , 16 kbps, 64 kbps
	Audio I/O	1/1
	Two-Way Communication	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection (Capture), Human & Vehicle Detection (Capture), Abnormal Speed, Wrong Way Detection, Illegal Parking, Signal Bad
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day / Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot, Scheduled / Manual Alarm
	Alarm Notifications	E-mail, HTTP, FTP, SD Card & Alarm Out (Event upload through E-mail, HTTP, FTP & SD Card)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, RTCP/RTP, RTSP, DHCP, NTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, IGMP, QoS, 802.1x, SFTP, SNMP, SSL/TLS1.2
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication , HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G,T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	RS485	Supported
	CVBS Output	Supported
	Edge Storage	SD card slot, up to 256GB
	ANR	Supported
	Max User Access	32
	Client Application	EyeGuard
GENERAL	Power Supply	12V DC/ 24V AC/ PoE (IEEE 802.3af)
	Max. Power Consumption	5 W
	Working Temperature	-40 °C ~ 60 °C
	Working Humidity	≤95% RH
	Ingress Protection	IP66
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	150.2x75x69.7 mm
	Net Weight	0.40 kg

Dimension Unit : mm

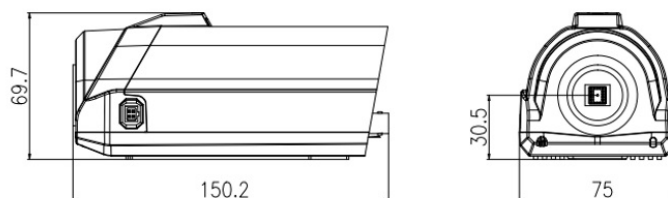

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBL50-00R-70	2MP 60fps H.265 IP Box Camera with CS Mount Lens, PoE, SD Card Slot ,WDR and Smart Analytics	1

★Product specification and availability are subject to change without notice.

2MP BOX CAMERA



ENC-HBL50-00R-70

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBL50-00R-70	Carton Box	-	-