


12MP BOX CAMERA



ENC-HBLCO-00R-65

FEATURES

12MP Resolution
 ONVIF Profile (S, G, T)
 Triple Stream
 Auto Back Focus
 Audio and Alarm Support
 PoE, IP66, IK10

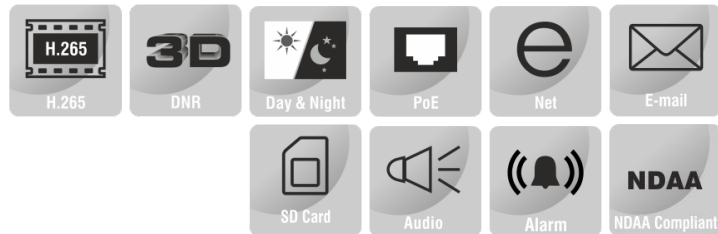

SPECIFICATION

MODEL	Model No.	ENC-HBLCO-00R-65
	Type	12MP BOX CAMERA
CAMERA	Image Sensor	1/1.7" CMOS Progressive 12.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	C/CS Mount
	Iris	DC Iris
	Aperture	F1.2
	Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 Lux @ F1.2, B/W: 0 Lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Zoom	16x
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
	Defog	Smart Defog
	WDR	120 dB
VIDEO	Max. Resolution	4000×3000
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (4000×3000, 4096×2160, 3840×2160, 1920×1080, 1280×720) @ 25fps Sub Stream: (704×576, 640×480, 352×288) @ 25/30fps Third Stream: (640×480, 352×288, 320×240) @25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/night, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 Regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes
ROI	Up to 8 Regions	
Privacy Mask	Up to 4 Regions	

★Product specification and availability are subject to change without notice.


12MP BOX CAMERA



ENC-HBLCO-00R-65

MODEL	Model No.	ENC-HBLCO-00R-65
	Type	12MP BOX CAMERA
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64Kbps, 128Kbps
	Audio I/O	1/1
	Two-Way Communication	Supported
SMART	Built-in Mic	Supported
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	Face Detection (Capture), People Counting, Human & Vehicle Classification, Wrong Way Detection
	Alarm Management	Motion Detection, Input & Output Event, Network Alarm, Disk Alarm, Day / Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot, Scheduled / Manual Alarm
INTERFACE	Alarm Notifications	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, Telnet, SSL/TLS1.2, RTMP (Optional)
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication, HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G,T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Serial Interface	1 x RS485
	CVBS Output	Supported
	Edge Storage	SD card slot, up to 1TB
	ANR	Supported
GENERAL	Max User	32
	Client Application	EyeGuard
	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	3 W
	Working Temperature	-40 °C ~ 65 °C
	Working Humidity	≤95% RH
	Ingress Protection	IP66
	Vandal Resistant	IK10
	Surge Protection	TVS4000V
	Reset Button	Supported
Dimensions	150.2x75x69.7 mm	
Net Weight	0.4 kg	

Dimension Unit : mm

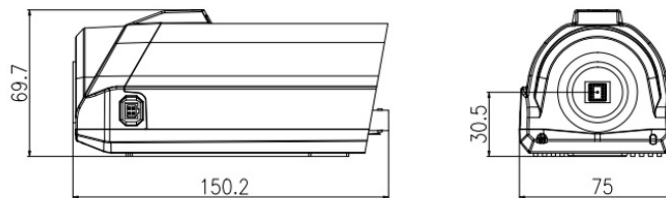

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBLCO-00R-65	12MP Starlight IR IP H.265 Box Camera with CS Mount Lens Interface, Built-in Mic, WDR, PoE and SD Card Slot and Smart Analytics (without Lens)	1

★Product specification and availability are subject to change without notice.

12MP BOX CAMERA



ENC-HBLCO-00R-65

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBLCO-00R-65	Carton Box	-	-