


The Overall Foil Shielded Paired Cable from NORDEN is suitable to use for RS-232 low speed hand shake applications. The 24 AWG Cable is constructed with PVC insulation, 100 % Aluminium Foil Polyester Tape Overall Shielded and a PVC Outer Jacket.

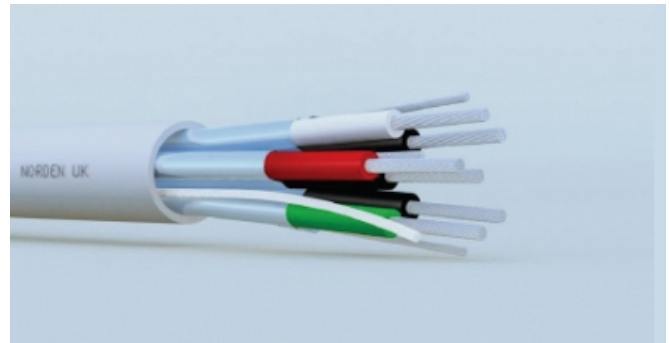

CABLE CONSTRUCTION

| | | |
|---|---|--|
| Conductor Tinned Copper | Screen Al-Polyester Tape Foil (100 % Coverage) | Sheath Color Grey |
| Insulation PVC (PVC Sheath) or PE (LSZH Sheath) | Drain Wire Stranded Tinned Copper (24 AWG 7x30) | Standard Packing Mode 305 mtr / Plywood Reel |
| Rip Cord Nylon | Sheath PVC or LSZH | |

INSULATION COLOR CODE

| Individual Pair | Colour | Individual Pair | Colour |
|-----------------|--------------|-----------------|--------------|
| 1 | Black/Red | 6 | Black/Brown |
| 2 | Black/White | 7 | Black/Orange |
| 3 | Black/Green | 8 | Red/White |
| 4 | Black/Blue | 9 | Red/Green |
| 5 | Black/Yellow | 10 | Red/Blue |

ORDERING INFORMATION

▷ 24 AWG Overall Foil Shielded PVC

| Part Number | Number of Pair(s) | Conductor Size | | Outer Diameter (mm) | Weight (kg/km) |
|-------------|-------------------|----------------|----------|---------------------|----------------|
| | | AWG | Stranded | | |
| 76-1201241 | 1 | 24 | 7x32 | 3.9 | 17.8 |
| 76-1202241 | 2 | 24 | 7x32 | 5.6 | 38.6 |
| 76-1203241 | 3 | 24 | 7x32 | 5.8 | 38.7 |
| 76-1204241 | 4 | 24 | 7x32 | 6.7 | 47.6 |
| 76-1206241 | 6 | 24 | 7x32 | 7.3 | 65.4 |
| 76-1208241 | 8 | 24 | 7x32 | 8.2 | 83.3 |
| 76-1210241 | 10 | 24 | 7x32 | 9.3 | 101.2 |

▷ 24 AWG Overall Foil Shielded LSZH

| Part Number | Number of Pair(s) | Conductor Size | | Outer Diameter (mm) | Weight (kg/km) |
|-------------|-------------------|----------------|----------|---------------------|----------------|
| | | AWG | Stranded | | |
| 76-3201242 | 1 | 24 | 7x32 | 4.2 | 18.3 |
| 76-3202242 | 2 | 24 | 7x32 | 5.8 | 40.2 |
| 76-3203242 | 3 | 24 | 7x32 | 6.2 | 41.3 |
| 76-3204242 | 4 | 24 | 7x32 | 6.9 | 50.6 |
| 76-3206242 | 6 | 24 | 7x32 | 7.5 | 68.3 |
| 76-3208242 | 8 | 24 | 7x32 | 8.4 | 87.9 |
| 76-3210242 | 10 | 24 | 7x32 | 9.5 | 108.6 |