


EIA RS-422 Application 24 AWG Cable



The Overall Foil Shielded Paired Cable from NORDEN is suitable to use for RS-422 medium speed balanced digital applications. The 24 AWG Cable is constructed with PE insulation, 100 % Aluminium Foil Polyester Tape Overall Shielded and a PVC Outer Jacket.

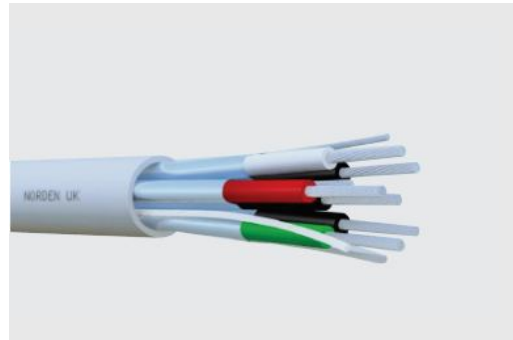

CABLE CONSTRUCTION

Conductor Tinned Copper	Screen Al-Polyester Tape Foil (100 % Coverage)	Sheath Color Grey
Insulation PE (Polyethylene)	Drain Wire Stranded Tinned Copper (24 AWG 7x30)	Standard Packing Mode 305 mtr / Plywood Reel
Rip Cord Nylon	Sheath PVC (Polyvinyl Chloride)	

INSULATION COLOR CODE

Individual Pair	Colour
1	Blue/Red
2	Black/White
3	Black/Green
4	Black/Blue
5	Black/Yellow
6	Black/Brown

ORDERING INFORMATION

▷ 24 AWG Individual Foil Shielded PVC

Part Number	Number of Pair(s)	Conductor Size		Outer Diameter (mm)	Weight (kg/km)
		AWG	Stranded		
77-3302241	2	24	7x32	6.7	52.0
77-3303241	3	24	7x32	8.4	62.5
77-3304241	4	24	7x32	9.2	75.8
77-3306241	6	24	7x32	10.6	110.0