

# 2MP MOTORIZED BULLET CAMERA



**ENC-HBU5M-60R-94**

## FEATURES

Starlight Illumination
2.7-13.5 mm Motorized Lens
Smart IR up to 60 m
ONVIF Profile (S, G, T)
Triple Stream
Audio and Alarm Support
PoE, IP67



## SPECIFICATION

MODEL	Model No.	ENC-HBU5M-60R-94
	Type	2MP MOTORIZED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized
	Focal Length	2.7-13.5 mm
	Focus	Auto / Manual
	Iris	DC Auto Iris
	Lens Mount	Φ14
	Angle of View (H)	105.6° ~ 29°
	Angle Adjustment	Bracket; Pan: 0~360°, Tilt: 0~75°, Rotate: 0~360°
	Aperture Range	F1.6 ~ F3.3
	Shutter	1s to 1/100,000s
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	55 dB
	Defog	Smart Defog
	WDR	120 dB
Smart IR	Up to 60 m	
Wavelength	850 nm	
White LEDs	N/A	

# 2MP MOTORIZED BULLET CAMERA



## ENC-HBU5M-60R-94

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HBU5M-60R-94</b>
	<b>Type</b>	2MP MOTORIZED BULLET CAMERA
<b>VIDEO</b>	<b>Max. Resolution</b>	1920x1080
	<b>Video Compression</b>	H.265+, H.265, H.264
	<b>Frame Rate</b>	Main Stream: (1920x1080, 1280x720, 704x480, 640x480) @ 30fps, (1920x1080, 1280x720, 704x576, 640x480) @ 25fps Sub Stream: (704x480, 704x240, 640x360, 352x240) @ 30fps, (704x576, 704x288, 640x360, 352x288) @ 25fps Third Stream: (704x480, 704x240, 352x240) @ 30fps, (704x576, 704x288, 352x288) @ 25fps
	<b>Stream Settings</b>	i-Frame, PAL/NTSC, Frame Rate (1~30FPS), EIS, SVC
	<b>Video Bit Rate</b>	32 kbps ~ 6 Mbps
	<b>Bitrate Type</b>	CBR, VBR
	<b>Image Settings</b>	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	<b>White Balance</b>	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	<b>HLC</b>	Supported
	<b>BLC</b>	Supported
	<b>OSD</b>	Total 3 regions
	<b>OSD Type</b>	Title, Week, Date, Time, Text with different colors and adaptable sizes (16x16, 32x32, 48x48)
	<b>ROI</b>	Up to 8 regions
	<b>Privacy Mask</b>	Up to 4 regions
<b>AUDIO</b>	<b>Audio Compression</b>	G.711A, G.711U, ADPCM_D
	<b>Audio Bit Rate</b>	8 kbps ~ 48 kbps
	<b>Audio I/O</b>	1/1
	<b>Audio Voltage</b>	Input: Level 5V, Input Impedance 1500 ohms Output: Level 3V, Output Impedance 100 ohms
	<b>Built-in Mic</b>	Supported with noise cancellation
<b>SMART</b>	<b>Behavior Detection</b>	Intrusion (Perimeter), Crossline (Tripwire)
	<b>Intelligent Identification</b>	N/A
	<b>Statistical Analysis</b>	N/A
	<b>Alarm Management</b>	Motion Detection, Tampering (Masking), Input & Output Event, IP & MAC Address Conflict, Disk Alarm (Full & R/W Error), FTP Server Exception, Abnormal Voltage, Pre/Post Alarm Recording, Alarm Recording/Snapshot
<b>INTERFACE</b>	<b>Protocols</b>	TCP/IP, UDP, IPv4, ICMP, HTTP, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, P2P
	<b>Security</b>	AES Video Encryption, IP Filter, User Authentication (Multiple Privilege Level)
	<b>Compatibility</b>	ONVIF Profile (S, G, T), SDK/API/CGI
	<b>Network</b>	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	<b>Wi-Fi</b>	N/A
	<b>Alarm Interface</b>	1 Input / 1 Output
	<b>Alarm Voltage</b>	Input (switch type) , Output (3.3V-12V, 10 ohm)
	<b>RS485</b>	N/A
	<b>RS232</b>	N/A
	<b>USB</b>	N/A
	<b>Edge Storage</b>	Built-in Micro SD card slot, up to 512 GB
	<b>ANR</b>	Supported
	<b>Built-in Speaker</b>	N/A
	<b>Built-in Heater</b>	N/A
	<b>Cable Interface</b>	Pig Tail
<b>Remote Connection</b>	≤7	
<b>Web Client</b>	EyeConnect	
<b>Web Language</b>	16	


# 2MP MOTORIZED BULLET CAMERA



## ENC-HBU5M-60R-94

<b>MODEL</b>	Model No.	ENC-HBU5M-60R-94
	Type	2MP MOTORIZED BULLET CAMERA
<b>GENERAL</b>	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	8 W (12V DC), 10 W (PoE)
	Working Temperature	-35 °C ~ 60 °C
	Working Humidity	0-95% RH (non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	IK10 (Housing)
	Surge Protection	Supported
	Reset Button	Supported
	Dimensions	238.4x83.6x76.2 mm
	Net Weight	0.93 kg

Dimension Unit : mm

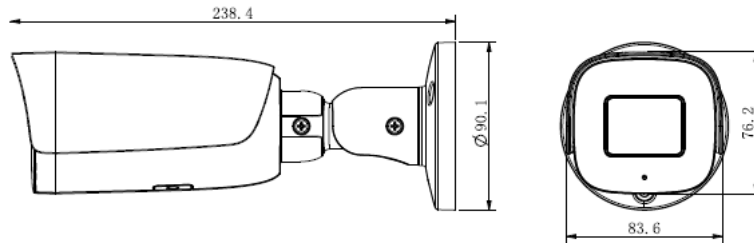

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5M-60R-94	2MP Starlight IR IP H.265 Bullet Camera with 2.7-13.5mm Motorized Lens, PoE, WDR, SD Card Slot and 60m IR Support	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU5M-60R-94	Carton Box	-	-