


# 2MP FIXED COMPACT DOME CAMERA



## ENV-HCD5F-15R-65

### FEATURES

2.8 mm Fixed Lens
Smart IR up to 15 m
ONVIF Profile (S, G, T)
Quad Stream
Built-in Mic
PoE, IP67

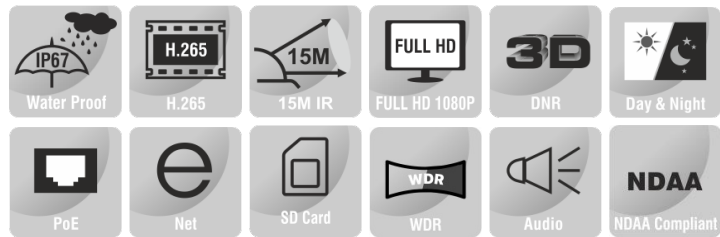

### SPECIFICATION

MODEL	Model No.	ENV-HCD5F-15R-65
	Type	2MP FIXED COMPACT DOME CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	2.8 mm
	Digital Zoom	16x
	Focus	Fixed
	Iris	Fixed
	Angle of View (H)	95.5°
	Angle of View (V)	51.9°
	Angle of View (D)	108.6°
	Angle Adjustment	Pan ± 45°, Tilt 0~72°, Rotate 0~360°
	Aperture	F1.6
	Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 15 m	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

# 2MP FIXED COMPACT DOME CAMERA



## ENV-HCD5F-15R-65

MODEL	Model No.	ENV-HCD5F-15R-65
	Type	2MP FIXED COMPACT DOME CAMERA
DORI	Lens	2.8 mm
	Detection	44.0 m
	Observation	17.6 m
	Recognition	8.8 m
	Identification	4.4 m
VIDEO	Max. Resolution	1920x1080
	Video Compression	Enhanced (H.264, H.265), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080, 1280x720, 704x576) @ 25/30fps Sub Stream: (1920x1080, 1280x720, 704x576) @ 15fps Third Stream: (640x480, 352x288, 320x240, 176x144) @ 15fps Fourth Stream: (640x480, 352x288, 320x240, 176x144) @ 15fps (Optional)
		(Customizable to Triple Stream Main Stream: (1920x1080, 1280x720, 704x576) @ 25/30fps Sub Stream: (1280x720, 704x576) @ 25/30fps Third Stream: (640x480, 352x288, 320x240, 176x144) @ 15fps)
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate, EIS
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
Privacy Mask	Up to 4 regions	
AUDIO	Audio Compression	G.711U, G.711A, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection, People Counting, Human & Vehicle Detection, Abnormal Video & Audio Detection, Wrong Way Detection, Illegal Parking, Tampering / Masking / Scene Change, Abnormal Speed
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail (Notification & Snapshot), HTTP (Alarm icon), FTP (Snapshot & Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, Telnet, SSL/TLS1.2
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Edge Storage	SD card slot, up to 512 GB
	ANR	Supported
	Mas User	32
	Client Application	EyeGuard

★Product specification and availability are subject to change without notice.


# 2MP FIXED COMPACT DOME CAMERA



## ENV-HCD5F-15R-65

MODEL		ENV-HCD5F-15R-65
Type		2MP FIXED COMPACT DOME CAMERA
GENERAL	Power Supply	12V DC , PoE (IEEE 802.3af)
	Max. Power Consumption	≤6 W
	Working Temperature	-40 °C ~ 65°C
	Working Humidity	≤95% RH (non-condensing)
	Ingress Protection	IP67
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	99.5 × 99.5 × 63 mm
Net Weight		0.38 Kg

Dimension Unit : mm

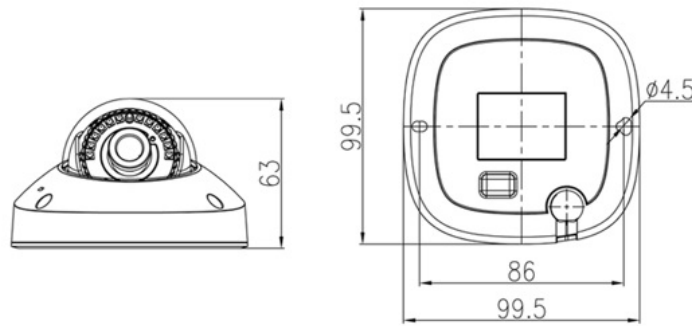

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCD5F-15R-65	2MP H.265 IR IP Compact Dome Camera with 2.8mm Lens, WDR, PoE, SD Card Slot , Built-in Mic, Smart Analytics and 15m IR Support	1
ENB-BCDJ65	Junction Box for Norden Dome Camera	1
ENB-BCDQ65	Pendant Cap for Norden Dome Camera	1
ENB-BCDP66	Pendant Mount for Norden Dome Camera	1
ENB-BCDW66	Wall Mount for Norden Dome Camera	1
ENB-BCDV66	Pole Mount for Norden Dome Camera	1
ENB-BCDH66	Corner Mount for Norden Dome Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HCD5F-15R-65	Carton Box	-	-