

# 8MP BOX CAMERA



**ENC-HBLAO-00R-94**

## FEATURES

Starlight Illumination
8MP Resolution
ONVIF Profile (S, G, T)
Triple Stream
Auto Back Focus
Audio and Alarm Support
PoE



## SPECIFICATION

MODEL	Model No.	<b>ENC-HBLAO-00R-94</b>
	Type	8MP BOX CAMERA
CAMERA	Image Sensor	1/1.7" CMOS Progressive 8.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	CS Mount
	Iris	DC Auto Iris
	Shutter	1s ~ 1/100,000s
	Min. Illumination	Color: 0.009 lux @ F1.2, B/W: 0.0009 lux @ F1.2
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	55 dB
	Defog	Smart Defog
	WDR	120 dB
VIDEO	Max. Resolution	3840x2160
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: (3840x2160) @ 25/30fps, (1920x1080) @ 50/60fps Sub Stream: (D1, VGA, CIF) @ 25/30fps Third Stream: (VGA, CIF, QVGA) @ 25/30fps
	Video Bit Rate	10 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night
	White Balance	Auto, Daynight, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Supported
	ROI	Up to 8 Regions
	Privacy Mask	Supported


# 8MP BOX CAMERA



**ENC-HBLAO-00R-94**

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HBLAO-00R-94</b>
	<b>Type</b>	8MP BOX CAMERA
<b>AUDIO</b>	Audio Compression	G.711U, G.711A, RAW_PCM
	Audio Bit Rate	8 kbps ,16 kbps, 64 kbps
	Audio I/O	1/1
	Built-in Mic	Supported
<b>SMART</b>	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Abnormal Speed, Wrong Way Detection, Illegal Parking, Signal Bad
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day / Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, RTP/RTSP, RTSP, DHCP, NTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, IGMP, QoS, 802.1x, Unicast, Multicast, SNMP, TLS/SSL
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm Interface	1 Input / 1 Output
	RS485	Supported
	CVBS Output	Supported
	Edge Storage	SD card slot, up to 128 GB
	Max User Access	10
	Web Client	EyeGuard
<b>GENERAL</b>	Power Supply	12V DC/ 24V AC/ PoE (IEEE 802.3af)
	Max. Power Consumption	5 W
	Working Temperature	-30 °C ~ 55 °C
	Working Humidity	<90% RH
	Ingress Protection	IP66
	Vandal Resistant	IK10
	Reset Button	Supported
	Dimensions	150.2×75×69.7 mm
Net Weight	0.40 kg	

Dimension Unit : mm

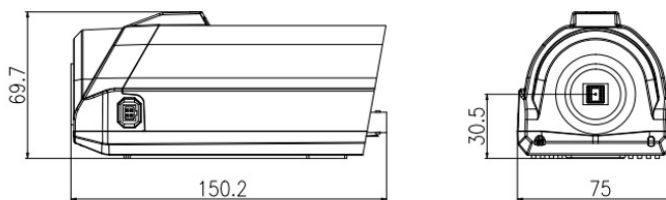

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBLAO-00R-94	8MP Starlight H.265 Box Camera with CS mount Lens Interface, PoE, WDR, SD Card Slot, Built-in Mic and Smart Analytics (without Lens)	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBLAO-00R-94	Carton Box	-	-