

2MP VEHICLE PTZ CAMERA



ENC-HVP5Z-100R-15

FEATURES

30X Optical Zoom, 16X Digital Zoom


ONVIF Profile (S, G, T)

Triple Stream

Wiper Support

Top Mounted on Vehicle

IP67

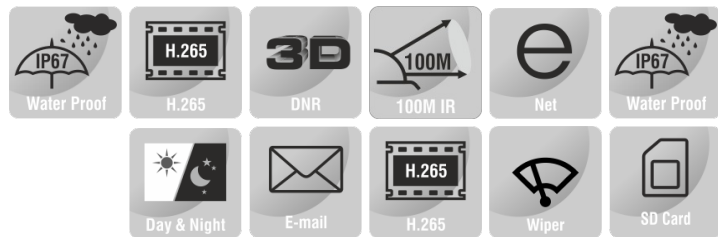

SPECIFICATION

MODEL	Model No.	ENC-HVP5Z-100R-15
	Type	2MP VEHICLE PTZ CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Zoom Lens
	Focal Length	4.5 ~ 135 mm (Optional 4.3 ~ 129mm)
	Focus	Auto / Semi Auto / Manual
	Iris Type	DC Auto Iris
	Angle of View (H)	59.8° ~ 2.3°
	Angle of View (V)	35.1° ~ 1.3°
	Angle of View (D)	69.3° ~ 2.6°
	Aperture Range	F1.6 ~ F4.4
	Optical Zoom	30X
	Digital Zoom	16X
	Shutter	1s-1/100,000s
	Min. Illumination	Color: 0.01 lux @ F1.2, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 100m	

★Product specification and availability are subject to change without notice.


2MP VEHICLE PTZ CAMERA



ENC-HVP5Z-100R-15

MODEL		ENC-HVP5Z-100R-15
Type		2MP VEHICLE PTZ CAMERA
VIDEO	Max. Resolution	1920x1080
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: 1920x1080/1280x720 @ 50/60fps Sub Stream: D1/VGA/640x360/CIF/QVGA @ 25/30fps Third Stream: VGA/CIF/QVGA @ 25/30fps
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day / Night
	White Balance	Auto, Day / night, Tungsten, Manual
	HLC	Supported
	BLC	Supported
	OSD	Supported
	ROI	Up to 8 regions
Privacy Mask	Up to 4 regions	
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, TLS/SSL
	Security	IP Address Filtering, User Authentication (Multiple Privilege Level), 802.1X Authentication, HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF (S, G, T), SDK, CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Serial Interface	1xRS485
	Edge Storage	SD card 256GB
PAN AND TILT	Wiper	Supported
	Pan Range	360°
	Pan Speed	Pan Manual Speed: 0.1°/s ~ 80°/s Pan Preset Speed: 100°/s
	Tilt Range	+180°
	Tilt Speed	Tilt Manual Speed: 0.1°/s ~ 60°/s Tilt Preset Speed: 80°/s
	3D Position	Supported
	Cruise Track	8
	Power-off Memory	Supported
GENERAL	Power Supply	12V DC
	Max. Power Consumption	≤18W
	Working Temperature	-40 °C ~ +65 °C
	Working Humidity	≤95% RH (non-condensing)
	Ingress Protection	IP67
	Reset Button	Supported
	Dimensions	248x374x210 mm
	Net Weight	5.5 kg
Bracket	Optional	

Dimension Unit : mm

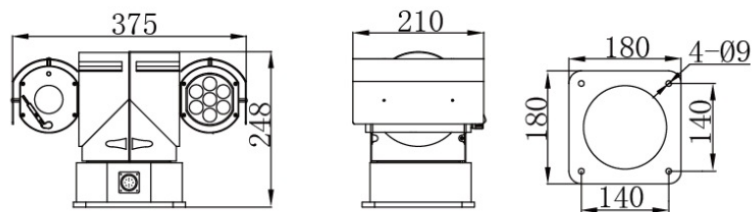

★Product specification and availability are subject to change without notice.

2MP VEHICLE PTZ CAMERA



ENC-HVP5Z-100R-15

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HVP5Z-100R-15	2MP IR IP H.265 Vehicle PTZ Camera with 30X Optical Zoom, SD Card Slot, Wiper and 100M IR Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HVP5Z-100R-15	Carton Box	-	-