
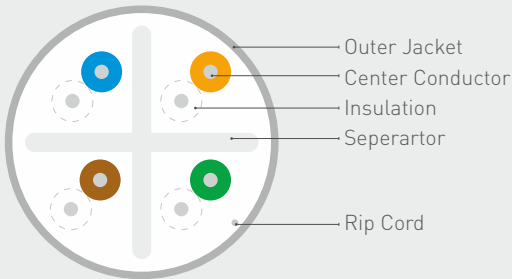


CATEGORY 6 U/UTP 23AWG 4 PAIR CABLE CMR

Norden Category 6 UTP cables exceed Category 6 / Class E specification. It is tested to 250 MHz frequency range and designed to support Gigabit 1000Base-T and 1000Base-Tx applications up to 100m. Norden Category 6 UTP cables are UL listed CMR and standard packing are in 305m easy pull out boxes.

Extremely high pair-balance providing excellent EMC (Electro Magnetic Compatibility), minimizing radiation, maximizing noise immunity and providing high alien cross talk performance to UTP (Unshielded Twisted Pair) cabling systems.

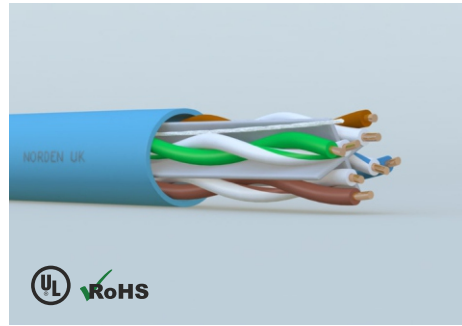

COMPLIANCE

IEEE 802.af, IEEE 802.3at for PoE applications
ANSI/TIA-568-C.2 Category 6
ISO/IEC-11801, Class E / IEC 61156-5: Category 6.

PRODUCT CLASSIFICATION

Product Sequence	Premium
Product Type	Twisted Pair Cable

MATERIAL CONSTRUCTION & DESIGN

Conductor Material	Bare Copper
Conductor Size	0.57 mm, 23 AWG
Conductor Construction	Solid
Insulation Material	High Density PE
Insulation Diameter	1.02±0.03 mm
Conductor Unit Identification	Solid/Stripe
Colour Code	Per TIA/EIA 568-B
Total Number of Wires	8
Rip Cord	Yes
Overall Drain-Wire Material	N/A
Overall Drain-Wire Size	N/A
Overall Drain-Wire Construction	N/A
Outer Jacket	FR PVC (CMR Rated)
Outer Jacket Thickness & Ex. Diameter	0.55±0.05 mm, 6.3±0.4 mm
Outer Jacket Colour	Per Requirement
Marking	Per Requirement

CATEGORY 6 U/UTP 23AWG 4 PAIR CABLE CMR

ELECTRICAL & MECHANICAL CHARACTERISTICS

Frequency Range	1 - 250 MHz
Impedance	100 Ω \pm 15
Coupling Attenuation	40 dB min @ 30-100 MHz 40-20 Log (f/100) @100-300 MHz
DC Resistance	73 Ω /km nom.
Max. Resistance Unbalance	4 %
Capacitance	5.6 nF/100m max.
Capacitance Unbalance	3.3 pF/m max.
Propagation Delay Skew	35 ns/100m max.
Velocity of Propagation	69 %
Dielectric Strength	1 KV/minute
Min. Insulation Resistance	5 G Ω •km
Max. Tensile Strength - Short Term	110 N
Min. Bend Radius	53.6 mm
Operating Temperature Range	-20°C to +65°C

TRANSMISSION PERFORMANCE

Cat. 6 Un-screened Pair Horizontal Cables*

Freq. MHz	Attenuation dB/100m @ 20°C	NEXT dB	PSNEXT dB	RL dB	ELFEXT dB	PSELFEXT dB
1	1.9	87.6	82.6	28.0	85.0	80.0
4	3.5	79.2	74.2	30.0	73.0	68.0
10	5.6	73.3	68.3	29.0	65.0	60.2
20	8.4	69.1	63.8	29.0	59.0	54.0
31.25	10.0	66.0	61.1	28.6	55.1	50.3
100	18.9	58.0	53.0	25.1	45.0	40.1
150	24.0	55.2	50.7	23.8	41.8	36.9
200	26.1	53.0	48.0	22.8	39.0	33.8
250	30.0	52.6	47.6	22.0	37.8	32.8

*Supplied cables meets Cat. 6 min. transmission requirements as per IEC 61156-5 Ed. 2

ORDERING INFORMATION

Part Number	Description	Standard Length
113-14704104X	Category 6 U/UTP 23 AWG 4 Pair CMR Rated FR PVC Cable	305 mtr

X: BK(Black), BL(Blue), GN(Green), GY(Gray), RD(Red), WH(White), YL(Yellow)

PACKING INFORMATION

Part Number	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
113-14704104X	Pulley Box	12.3	13.1	400 x 400 x 220