

# DIN RAIL PATCH PANEL BLANK

The Din Rail patch panel from Norden supports both unshielded and shielded cabling. It is used for mounting on Din Rail TH35 and has rotatable modules which allows cables routing to top or bottom.






## DESIGN & MATERIALS

Material	Plastic
Panel Style	Blank
Panel Metal	SPCC/Fe (electroplating)
Mounting Style	Din-Rail
Outlet Style	RJ-45
Outlets	8 ports
Temperature	- 20°C to 60°C
Humidity	0-90% non-condensing

## STANDARDS

Standards	DIN EN60715
Flammability rating	UL 94V-0

## DRAWING

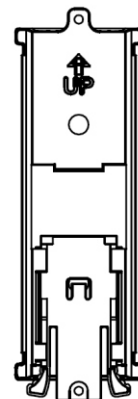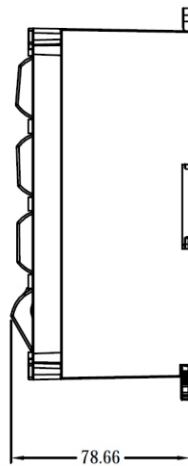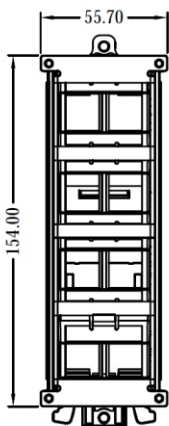

# DIN RAIL PATCH PANEL BLANK

## ORDERING INFORMATION

Part Number	Description	Dimensions (mm)
121-01D18008B	8 Port Unshielded Din Rail Patch Panel Blank	154 x 55.70 x 78.66
121-02D18008B	8 Port Shielded Din Rail Patch Panel Blank	154 x 55.70 x 78.66