

DIN RAIL/DESKTOP/ WALL MOUNT LOADED PATCH PANEL

Din Rail Loaded patch panel from Norden Exceeds TIA and ANSI components specifications. Supporting network convergence protocols, delivering maximum bandwidth and extended reliability for all Lan, Multimedia and Power over Ethernet applications. Support both Shielded and Unshielded cabling. It's comes with earth cable for functioning of the shielded system.

PCB provides easy termination using punch down tool and there are colour coded labels for both 568A and 568 B, Screw-on fixture on shielded patch panel provides most easy and efficient way for installation. This panel can be fixed as Desktop, Wall as well as Din Rail mount.



FEATURES

- Dual 568A/568B wiring label
- 110/Krone Universal IDC
- Screw-on cable fixture
- DIN Rail mounted or wall-mounted



DESIGN & MATERIALS

Material	PBT +G. F and Polycarbonate
Panel Style	PCB loaded
Panel Metal	SGCC
Mounting Style	DIN-Rail, Desktop, Wall Mount
Outlet Style	RJ-45, Phosphor bronze, 50u Gold Plating
Outlets	8, 12 Ports
Current Rating	1.5 A
Contact Resistance	500 MΩ MAX
Contact Resistance	20MΩ MAX
Temperature	20°C to 60°C

STANDARDS

Standards	ANSI/TIA-568.2-D ISO/IEC 11801 2 nd Edition
Flammability rating	UL 94V-0

DRAWING

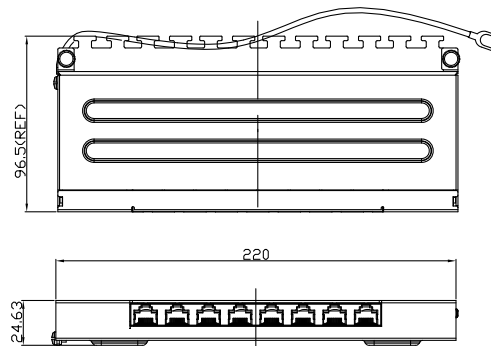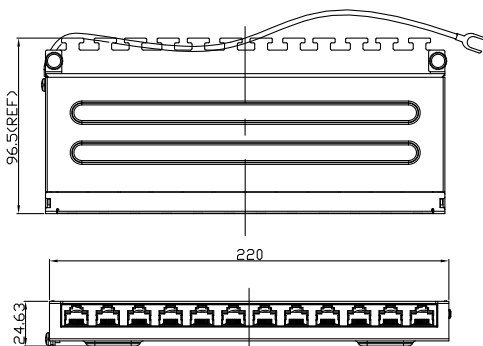

DIN RAIL/DESKTOP/ WALL MOUNT LOADED PATCH PANEL

ORDERING INFORMATION

Part Number	Description	Dimensions (mm)
121-42E18008L	CAT6A Din-Rail/Desktop/Wall Mount Shielded 8-port Loaded Patch Panel	96.5 X 24.63 X 21.83
121-42E18012L	CAT6A Din-Rail/Desktop/Wall Mount Shielded 12-port Loaded Patch Panel	96.5 X 24.63 X 21.83
121-31E18008L	CAT6 Din-Rail/Desktop/Wall Mount Unshielded 8-port Loaded Patch Panel	96.5 X 24.63 X 21.83
121-32E18008L	CAT6 Din-Rail/Desktop/Wall Mount Shielded 8-port Loaded Patch Panel	96.5 X 24.63 X 21.83
121-32E18012L	CAT6 Din-Rail/Desktop/Wall Mount Shielded 12-port Loaded Patch Panel	96.5 X 24.63 X 21.83