

9MP GLOBAL SHUTTER CAMERA



ENC-HBUBF-00R-72

FEATURES

1" Global Exposure CMOS
25 / 35 / 50 mm Fixed Lens / 16 ~ 38 mm Varifocal Lens
ONVIF Profile (S, G, T)
Dual Network Port Support
Built-in Polarizer
SD Card Slot Support up to 256 GB
IP66



SPECIFICATION

MODEL	Model No.	ENC-HBUBF-00R-72
CAMERA	Type	9MP GLOBAL SHUTTER CAMERA
	Image Sensor	1" 9MP Global Exposure CMOS
	Lens Type	Fixed
	Focal Length	25 / 35 / 50 mm (Fixed Lens) / 16 ~ 38 mm (Varifocal Lens)
	Focus	Fixed / Manual
	Aperture	Auto
	Electronic Shutter	1s ~ 1/100000s, Auto / Manual
	Min. Illumination	Color: 0.01 lux
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
VIDEO	Max. Resolution	4096x2160
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Video Frame Rate	25fps
	Frame Rate	Main Stream: (4096x2160, 2048x1536, 1920x1080, 1280x960, 1280x720) @25fps Second Stream: (1280x720, 704x576, 704x288, 352x288) @25fps Third Stream: (4096x2160) @25fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Bitrate Type	CBR, VBR
	OSD	Up to 3 regions
	OSD Type	Date, Time, Text with different colors and adaptable sizes
	ROI	Up to 7 regions
	Privacy Mask	Up to 4 regions
INTERFACE	Compatibility	ONVIF Profile (S, G, T), CGI
	Network	2x RJ45 10M/100M/1000M Self Adaptive Ethernet Port
	Audio I/O	1/1
	Alarm I/O	0/2
	Trigger I/O	10/10
	Serial Interface	7xRS485, 1xRS232
	USB Interface	1xUSB 2.0
Edge Storage	SD card slot, up to 256 GB	

★Product specification and availability are subject to change without notice.


9MP GLOBAL SHUTTER CAMERA



ENC-HBUBF-00R-72

MODEL		ENC-HBUBF-00R-72
Type		9MP GLOBAL SHUTTER CAMERA
GENERAL	Power Supply	AC 220V
	Max. Power Consumption	≤15 W
	Working Temperature	-40 °C ~ 70 °C
	Working Humidity	≤90% RH
	Ingress Protection	IP66
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	540x174x135 mm
	Weight	4.5 kg
	Accessories	1 Set of Universal Joint and Matching Screws; 1 Set of Bellows and Lock Head

Dimension Unit : mm

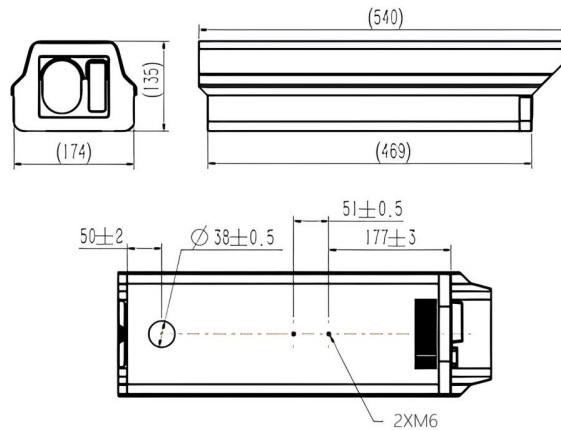

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBUBF-00R-72	9MP IP H.265 Global Shutter Bullet Camera with 25/35/50mm Fixed Lens or 16 ~38 mm Varifocal Lens and SD Card Slot Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBUBF-00R-72	Carton Box	6.1	780x275x250

★Product specification and availability are subject to change without notice.