


POWER DISTRIBUTION UNIT-UK SOCKET (45 DEGREE)

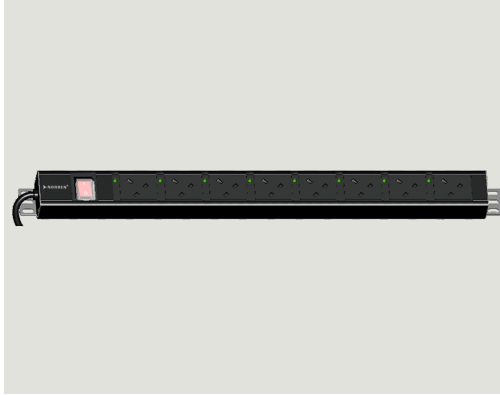

NORDEN Power Distribution Units are designed and manufactured for cabinets. The products are equipped with sockets that meet various systems and standards. These units can be customized according to the customer's specific requirements, and the sockets are angled at 45 degrees for easy access

*Product picture for reference only

COMPLIANCE

BS 5733, BS 6500
 Regulation: CE
 Environmental: RoHS
 Socket/Outlet Standard: BS1363
 Cable plug: Bs1363

DESIGN & MATERIALS


Material of Construction	PC/ABS alloy, High Impact FR thermoplastic -UUL94-V0
Shell Material & Colour	Aluminium, Black
Outlet Qty.	8 Way
Power Input Style	Left End Single Input (Top Entry)
Bracket Installation	Inverse Installation
Socket Type	BS1363 13A 45 Degree Socket
Cable With Plug	BS1363 13A Plug
Control Function	16Amp Lighted Switch
Protection Function	Individual power indicator
Cable Specification	3 x 16AWG
Lead Length	5 m (Other Cable Length Available On Request)

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	13A, 250 VAC
Maximum load current available in	13A
Input frequency	50 or 60 Hz
Maximum load capacity	3250W
Operating Environment	0 - 55 °C
Operating Relative Humidity	5% - 95 %
Operating Elevation	0-3000 metres
Storage Temperature	-20 °C to +70 °C
Storage Relative Humidity	5% - 95 %
Storage Elevation	0-3000 metres

POWER DISTRIBUTION UNIT-UK SOCKET (45 DEGREE)

DRAWING

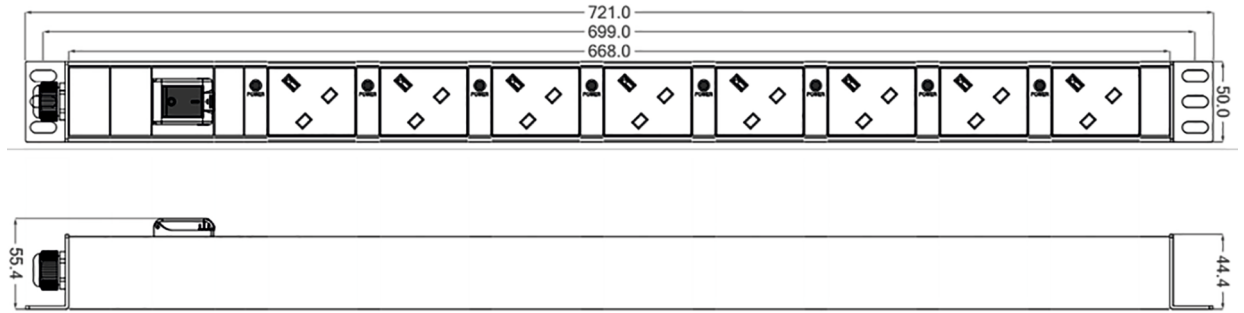

ORDERING INFORMATION

Part Number	Description
13 Amp PDU	
133I-108E08N003X	8 Way PDU with UK Plug & Socket(45degree), 13A, 5.0mtr, Vertical Installation