

NVS-10810030BS

30W DUAL-FACE WATERPROOF COLUMN SPEAKER



DESCRIPTION

The NVS-10810030BS is a weatherproof outdoor column speaker with a 70v/100v transformer built-in. The 70v/100v transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.

The built-in 4 units 4" and 2 unit 2.5" full range speaker drivers are designed of wide frequency response 140-14,000Hz, the multiple power taps of 30W & 60W could meet different applications varies from room size and ambient noise surroundings. The net cover is made of aluminum and would not rust, it is also designed of weatherproof and heavy damage proof finish; long-term durability, high sensitivity, dual direction phonating, clear and sonorous sound. Easy and secure wall mount installation in outdoor area through the supplied pair of metal mounting brackets. It is ideal choice for industrial and commercial applications in the outdoor area of train station, shopping mall, parking area and factory where background music and paging is needed.

FEATURES


- ⊕ IP66 waterproof level
- ⊕ Dual direction phonating
- ⊕ Wide Freq.Resp.:140Hz-14kHz
- ⊕ Aluminum enclosure & grille
- ⊕ Built-in 100v/70v transformer
- ⊕ Max SPL:105±2dB
- ⊕ High sensitivity:90±2dB
- ⊕ Weatherproof column type loudspeaker
- ⊕ 4 units 4" and 2 unit 2.5" full range drivers

Specifications	
Model	NVS-10810030BS
Full-range	4"×4, 2.5"×2
Rated Power	30W
Max Power	60W
Line Voltage	70/100V
Sensitivity (1M,1W)	90±2dB
Max SPL (1M)	105±2dB
Freq. Resp	140Hz-14kHz
Dimension(L×W×H)	160×250×410mm
Weight	5.5kg

NVS-10810030BS

30W DUAL-FACE WATERPROOF COLUMN SPEAKER

POSITIONING DIMENSIONS & DIAGRAM

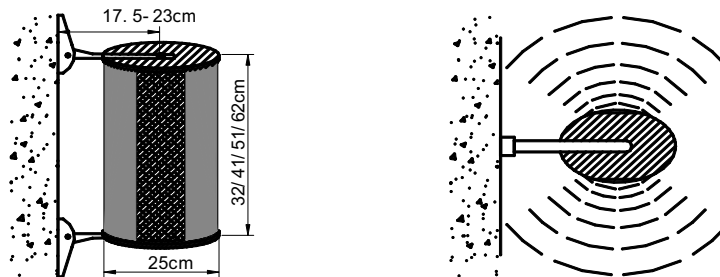


INSTALLATION

1. Fit 2 Ø8mm screws on the mounting surface and set the speaker system as above;
2. Connect audio broadcasting wire to the terminals according to the table below;


Power Impedance	Line Voltage	70V	100V
	Red-Blue		15 W
Red-White		30 W	60 W

4. Finally, adjust the direction of the system and examine whether it is steady

FREQ. RESPONSE (dB SPL, 1W, 1m)

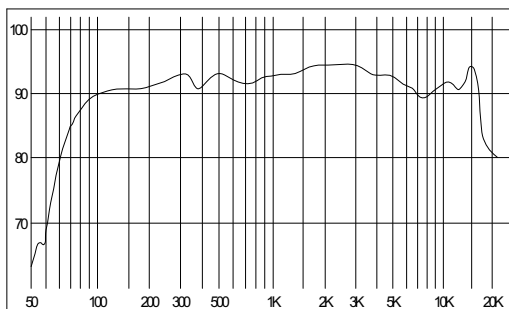

DISTORTION (THD < 1.5% 1W, 1m, 140Hz~14kHz)

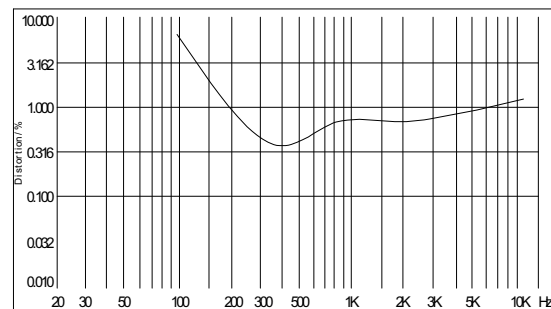

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10810030BS	30W Dual-face Waterproof Column Speaker	1 No.

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight(kg)	Dimensions(mm)
NVS-10810030BS	Carton Box	5.5	160×250×410