NVS-10010010WS



Wall Mounted Curved Speaker 10W



DESCRIPTION

The NVS-10010010WS is a Wall-Mounted Speaker with a 70V/100V transformer built in. The transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible. It is an ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

FEATURES

- Clear and sonorous sound
- 1.5-10W with multiple terminals
- Long life
- Easy installation
- Engineered from high-grade engineering plastic
- Built in 70V/100V transformer

| Specifications | | |
|--------------------------|------------------|--|
| Model | NVS-10010010WS | |
| Material | ABS Plastic | |
| Rated Power | 10W | |
| Driver Unit | 6.5"×1, 2"×1 | |
| Frequency Response | 160Hz-18kHz | |
| Power Taping Options | 3/6/10W | |
| Input Voltage/ Impedance | 70V/100V | |
| Sensitivity (1m,1w) | 94dB±2dB | |
| Maximum SPL (1m) | 104dB±2dB | |
| Coverage angle(HxV) | 165°x90° | |
| Input Connector | Push in terminal | |
| Operating temperature | -25°C~+60°C | |
| Weight | 1.75kg | |
| Dimension | 274x183mm | |




Wall Mounted Curved Speaker 10W

DIMENSION

Hanging Hole

Nail for Mounting

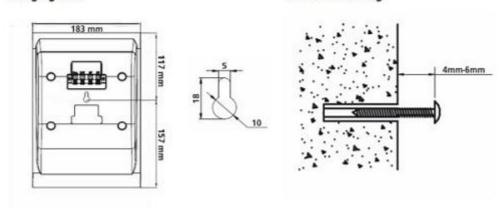

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|----------------|---------------------------------|-------------------|
| NVS-10010010WS | Wall Mounted Curved Speaker 10W | 01 |

ACCESSORIES INFORMATION

| Description | Standard Quantity |
|-------------|-------------------|
| User Manual | 01 |