NVS-IP20010SP

POE Ceiling speaker

DESCRIPTION

The product is a network active ceiling speaker that supports the network PA/intercom system, support for international standard SIP protocols, can accept PA and calls from the LAN/WAN, quickly place the place you need with just one network cable(PoE). Wide sound diffusion angle, and easy to install, which can super reproduce the voice and the music.

FEATURES

- ⊙ 10/100M self-adaptation, support DHCP/static IP, support LAN and WAN.
- ⊙ Support SIP2.0 (RFC3261) and related RFC.
- ⊙ Support narrow band coding: G.711a/u; wide band coding: G.722.
- ⊙ Support audio format: MP3, WAV, FLAC.
- ⊙ 6.5" full-range unit, with magnetic circuit encapsulated with special engineering plastic process, the drum paper formed with tripping and hot pressing of algae salved organisms and the rear cover with waterproof coating to realize stronger low frequency effect.
- ⊙ Adopt a fashionable ultra-narrow edge and carbon alloy aluminum mesh, and RAL white coating to integrate any indoors perfectly.
- ⊙ In accordance with the IEC 268-5 power handling capacity (PHC) standard, it can work 100 hours continuously under the rated power. When in the simulated acoustic feedback exposure (SAFE) test, it can withstand twice rated power in a short time to ensure the high reliability of the speaker in extreme conditions, prolong the service life and significantly reduce the risk of failure or performance degradation.
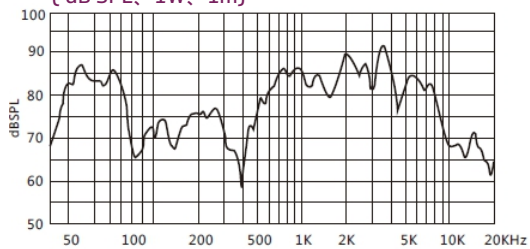- ⊙ Strong movable clamp design, durable and reliable, easy to install.

POE Ceiling speaker

Specifications

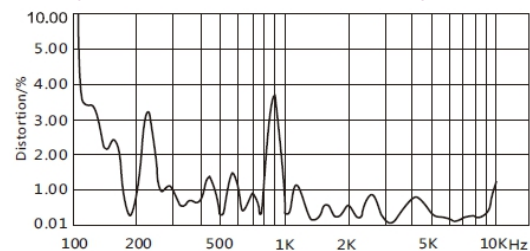| Model		NVS-IP20010SP
Amplifier Output	Rated power (RMS)	10W 8Ω
	SNR	≥73dB
	Channel separation	>60dB
Speaker	Speaker unit	6.5"
	Sensitivity	92dB±2dB
	MAX. SPL.	100dB±2dB
	Freq. Resp.	80Hz-16KHz
	Distortion	≤3%
Power Supply	Voltage	POE+(IEEE 802.3at) / DC24V 1A(backup)
Dimension	Dia.×H (mm)	190x190×105mm
Weight	Net weight (kg)	1.0kg

Freq. Response
(dB SPL、1W、1m)

Distortion
(THD< 5% 1W、1m、100Hz~10kHz)

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-IP20010SP	POE Ceiling speaker	1 No.

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight(kg)	Dimensions(mm)
NVS-IP20010SP	Carton Box	1.0	190×190×105