

NVS-IP30006PM IP NETWORK PAGING STATION



DESCRIPTION

NVS-IP30006PM is intelligent network paging station allow up to 1,000 zones which can be activated by simply one button. It can realize zone based calling and group based calling. Supports TCP/IP and is compatible to shared WAN/LAN network. The system can provide 1 AUX input,1 AUX output and 1 headphone monitoring interface to realize local extension. It provides log management and screen calibration functions. Users can view zone information. It can realize zone based calling and group based calling.


FEATURES

- ⊕ 1,000 zones which can be activated
- ⊕ 7-inch true colour LCD display
- ⊕ 1 aux input,1aux output and 1 headphone
- ⊕ Support TCP/IP
- ⊕ Users can view zone information.
- ⊕ Log management and screen calibration
- ⊕ The back light on time can be adjusted to save energy.
- ⊕ Shared WAN/LAN network


Specifications	
Model	NVS-IP30006PM
Rated Output Voltage	1.0±0.2V
MIC input sensitivity (1V output)	50±10mV
MIC distortion (1Kz/1V)	MIC: ≤0.2%
Effective frequency of MIC gain limit (±3dB)	40-20000Hz
MIC Signal to Noise Ratio (30K lowpass)	≥75dB
AUX input sensitivity (1V output)	300±50mV
AUX distortion (1Kz/1V)	AUX≤0.1%
AUX Signal to Noise Ratio (30K lowpass)	≥80dB
Effective frequency of AUX gain limit (±3dB)	20-20000Hz
Effective frequency of monitoring (talkback voice) gain limit (±3dB)	40-13000 Hz
Working voltage	AC180-240V
Standby power consumption	14.5W
Package dimensions (mm)	415×285×160mm
Net Weight	2kg

NVS-IP30006PM IP NETWORK PAGING STATION

REAR PANEL

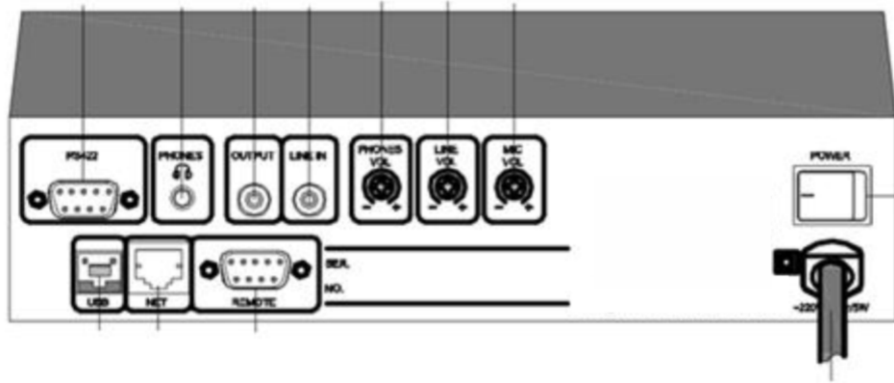

CONNECTION

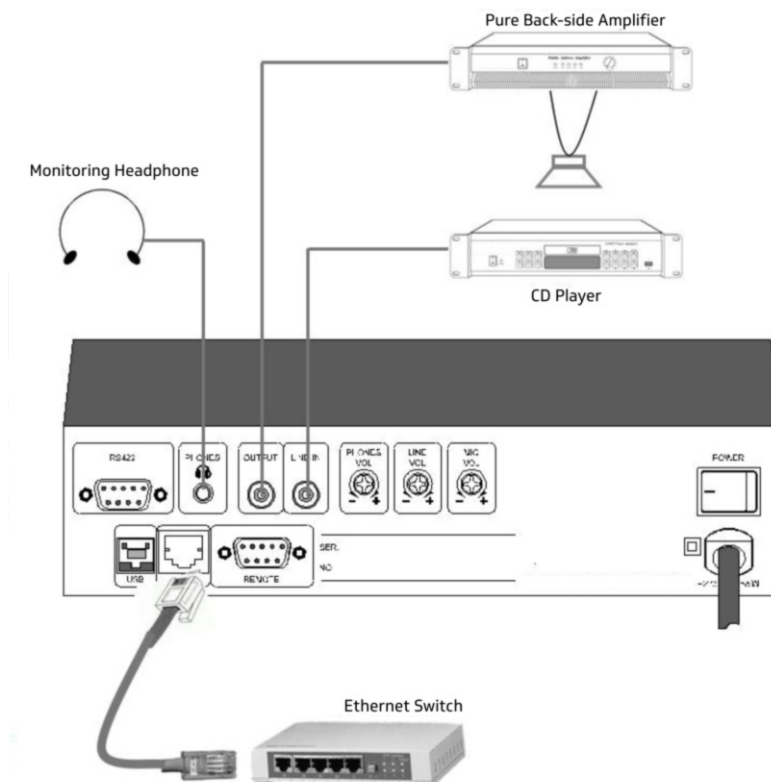

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-IP30006PM	IP Network Paging Station	1 No.

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight(kg)	Dimensions(mm)
NVS-IP30006PM	Carton Box	2.0	415×285×160