


CATEGORY 6A F/FTP PATCH CORD

Norden Cat6A F/FTP patch cord delivers optimal transmission & networking performance with reduced Insertion loss and Alien crosstalk. This is fully backward compatible to Category 6 (Class E) and Category 5e (Class D) products and maximizes productivity levels 10 times the data throughput of Category 6. Each patch cord is tested with Fluke tester and individual cover include with the report.

This Patch cord is tested for transmission frequencies up to 500 MHz and compatible with the 10 Gigabits applications, including the following protocols: Gigabit 1000BASE-T, 100BASE-T; 10 BASE-T (IEEE 802.3)4/16 Mbps Token Ring (IEEE 802.5); 100 VG-Any LAN100 Mbps TP-PMD (ANSI X3T9.5); 55/155 Mbps ATM Voice.

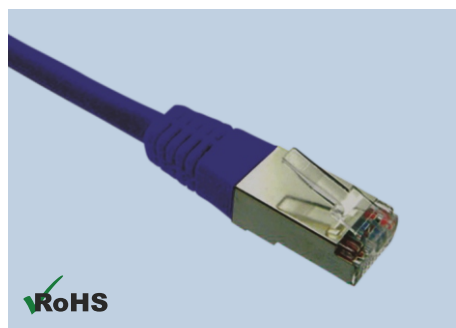

COMPLIANCE

IEEE 802.af and IEEE 802.3at for PoE applications
 IEEE 802.3an-2006, and ISO 11801 Class EA channel standards
 IEC 60603-7, ISO/IEC-11801, ANSI/TIA-968-A
 ANSI/TIA-568.2-D Category 6A

DESIGN & MATERIALS

Basic Cable Conductor	Stranded Bare Annealed Copper
Wire Insulation	SFS PE
Number Of Insulated Conductors	8
Colour Code Of Pairs	Blue x White, Orange x White, Green x White, Brown x White
Individual Pair Shield	Aluminium Foil
Overall Shield	Aluminium Foil
Drain Wire	Yes
Outer Jacket and Boots	PVC/LSZH
Jacket and Boot Colour	Per requirement
Standard Surface Marking	Includes Norden P/N, Cable Description
Cable O.D.	6.0 ± 0.2 mm
Bend Radius	> 25 mm without load
Storage Temperature	-20 °C to +80 °C
Temperature Operating Range	-20 °C to +75 °C
Wire Scheme	T568B

ELECTRICAL DATA

Impedance @ 1-250MHz	100 ±15 Ω
Impedance @ 250-500MHz	100 ±18 Ω
Conductor Resistance	< 73 Ω/km
Contact resistance	20 MΩ Max.
Resistance unbalance	2 % max.
Voltage rating	72 V dc
Dielectric strength	1 KV/min. rms
Ampacity	1.0 Amps max.
Insulation Resistance	150 MΩ/Km
Transfer Impedance	N/A
Pair to Ground Capacitance unbalance	3.3 nF/Km nom.

CATEGORY 6A F/FTP PATCH CORD

MECHANICAL & TRANSMISSION DATA

Cable to plug tensile strength	96 N min.
Pulling force	10 N max.
Durability	1000 Mating Cycles
Propagation Delay 1-250MHz	< 25 ns/100m

TRANSMISSION PERFORMANCE DATA

Freq. (MHz)	NEXT(dB) min.				RL(dB) min.
	1m cord	2m cord	5m cord	10m cord	
1	65.0	65.0	65.0	65.0	19.5
4	65.0	65.0	65.0	65.0	22.0
10	65.0	64.9	64.4	62.9	23.0
20	61.0	60.8	59.2	58.6	23.5
30	56.9	56.3	54.9	53.6	22.8
60	51.0	50.4	49.2	48.1	20.0
100	47.0	46.4	45.4	44.5	18.0
200	41.1	40.7	39.9	39.3	15.0
250	39.3	38.9	38.1	37.7	14.0
300	36.4	36.2	35.9	35.8	12.8
400	31.8	31.9	32.1	32.5	10.9
500	28.1	28.3	29.3	29.6	9.5

ORDERING INFORMATION

Part Number	Description	Length
127-41401X	Category 6a F/FTP Patch Cord PVC 01m	1m
127-41402X	Category 6a F/FTP Patch Cord PVC 02m	2m
127-41403X	Category 6a F/FTP Patch Cord PVC 03m	3m
127-41405X	Category 6a F/FTP Patch Cord PVC 05m	5m
127-41410X	Category 6a F/FTP Patch Cord PVC 10m	10m
127-41415X	Category 6a F/FTP Patch Cord PVC 15m	15m
127-41420X	Category 6a F/FTP Patch Cord PVC 20m	20m
127-41425X	Category 6a F/FTP Patch Cord PVC 25m	25m
127-42401X	Category 6a F/FTP Patch Cord LSZH 01m	01m
127-42402X	Category 6a F/FTP Patch Cord LSZH 02m	02m
127-42403X	Category 6a F/FTP Patch Cord LSZH 03m	03m
127-42405X	Category 6a F/FTP Patch Cord LSZH 05m	05m
127-42410X	Category 6a F/FTP Patch Cord LSZH 10m	10m

X: BK(Black), BL(Blue), GN(Green), GY(Gray), RD(Red), WH(White), YL(Yellow)

CATEGORY 6A F/FTP PATCH CORD

PACKING INFORMATION

Part Number	Packing Qty.	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
127-41401X	150 x 1	Carton Box	7.2	8.3	460 x 290 x 275
127-41402X	80 x 1	Carton Box	7.7	8.8	460 x 290 x 275
127-41403X	60 x 1	Carton Box	7.7	8.8	460 x 290 x 275
127-41405X	50 x 1	Carton Box	11.2	12.3	520 x 420 x 290
127-41410X	25 x 1	Carton Box	10.8	11.9	520 x 420 x 290
127-41415X	20 x 1	Carton Box	13.0	14.1	520 x 420 x 290
127-41420X	15 x 1	Carton Box	13.0	14.1	520 x 420 x 290
127-41425X	15 x 1	Carton Box	15.0	16.1	520 x 420 x 290
127-42401X	150 x 1	Carton Box	7.3	8.4	460 x 290 x 275
127-42402X	80 x 1	Carton Box	7.8	8.9	460 x 290 x 275
127-42403X	60 x 1	Carton Box	7.8	7.9	460 x 290 x 275
127-42405X	50 x 1	Carton Box	11.3	12.4	520 x 420 x 290
127-42410X	25 x 1	Carton Box	10.9	12.0	520 x 420 x 290