

Ceiling Speaker with Fire Dome 6W



DESCRIPTION

The NVS-10420006CS is a Ceiling Speaker with a fire dome and a built-in 70V/100V transformer. The transmission takes place in a high-voltage, low-current environment. Low-current mode allows for longer transmission distances and parallel connections of many loudspeakers. This speaker has a broad frequency response (100-16,000Hz). It's composed of high-quality steel and comes with clamps for easy installation. It'll last a long time and never go out of style or fade. The flush mount style of the dual-crossover construction allows for simple and secure installation. It can be used in a different occasions with varying area sizes and background noises, such as a train station, a park, a school, a square, a military camp, an industrial park, and so on.

FEATURES


- Long life
- Equipped with clamps for installation
- Long-term durability
- ⊙ Made of high-class steel
- Built-in 100V/70V transformer


| Specifications | | |
|-------------------------|----------------------|--|
| Model | NVS-10420006CS | |
| Rated Power | 6W | |
| Frequency Response | 100Hz-16kHz | |
| Power Taping Options | 1.5/3/5/6W | |
| Input Voltage/Impedance | 70V/100V | |
| Coverage Angle | 175° | |
| Connector type | Quick push type lock | |
| Cutout size | Ø170 | |
| Sensitivity(1m,1w) | 91dB±2dB | |
| Maximum SPL(1m) | 96dB±2dB | |
| Operating temperature | -25°C~+57°C | |
| Weight | 1.2Kg | |
| Dimension | Ø180 x 100 mm | |



Ceiling Speaker with Fire Dome 6W

DIMENSION



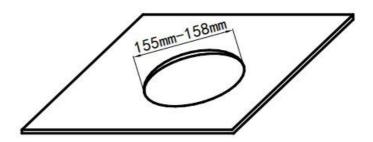

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|----------------|-----------------------------------|-------------------|
| NVS-10420006CS | Ceiling Speaker with Fire Dome 6W | 01 |

ACCESSORIES INFORMATION

| Description | Standard Quantity |
|---------------|-------------------|
| User Manual | 01 |
| Warranty Card | 01 |