

Conference System Extension Controller



Extension Controller

DESCRIPTION

The NVS-DC600083CE works with the conference controller to extend the maximum number of conference units. It supports up to 32 extension controllers in a conference system. It may be installed on a 19-inch standard cabinet and is easy to install and space saving. It has a trendy and elegant 2U premium cabinet design.


FEATURES

- ◉ Works with conference controller to extend the maximum number of conference units
- ◉ 8 Pin-DIN sockets
- ◉ Extension controller allows connection of up to 128 conference units
- ◉ 2U luxurious cabinet design
- ◉ Premium metallic design

| Specifications | |
|---------------------------|---------------------|
| Model | NVS-DC600083CE |
| Frequency response | 40Hz-20kHz (-3dB) |
| Signal Noise Ratio | >80dB |
| Total Harmonic Distortion | <0.3% |
| Static Power Consumption | 10W |
| Maximum Power Consumption | 350W |
| Output Power | ≤110W/3 way, 24V |
| Quantity of maximum units | 128ps |
| Power Supply | 220V-240V/50Hz/350W |
| Weight | 6.3 Kg |
| Dimensions (L×W×H) | 484×385×88 (mm) |


Conference System Extension Controller

FRONT PANEL

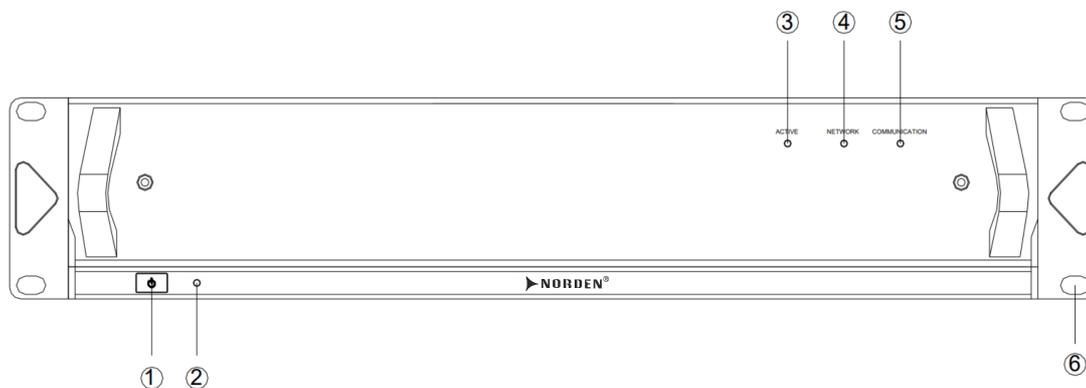

- 1.Power Button
- 2.Power Indicator Light
- 3.Signal Status Indicator
- 4.Network Status Indicator
- 5.Communication Status Indicator
- 6.Rack Mount Hole

REAR PANEL

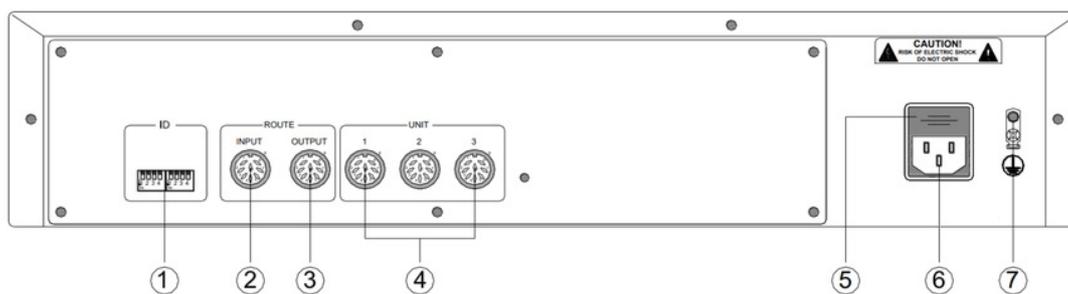

- 1.DIP switch for address setup (ID)
- 2.Extension input port (ROUTE INPUT)
- 3.Extension output port (ROUTE INPUT)
- 4.Conference unit output port (UNIT)
- 5.Fuse Holder
- 6.Power Input(AC 220V)
- 7.Ground

NVS-DC600083CE



Conference System Extension Controller

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|----------------|----------------------------------------|-------------------|
| NVS-DC600083CE | Conference System Extension Controller | 01 |

ACCESSORIES INFORMATION

| Description | Standard Quantity |
|-------------|-------------------|
| Power cord | 1 |
| User Manual | 1 |