

2MP BOX CAMERA



ENC-HBL50-00R-71

FEATURES

- 2MP Resolution
- ONVIF Profile (S, G,T)
- Triple Stream
- 140 dB WDR
- Auto Back Focus
- Audio and Alarm Support
- PoE



SPECIFICATION

MODEL	Model No.	ENC-HBL50-00R-71
	Type	2MP BOX CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	CS Mount
	Iris	DC Auto Iris
	Shutter	1s ~ 1/100,000s
	Min. Illumination	Color: 0.001 lux @ F1.2, B/W: 0.0001 lux @ F1.2, 0 lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	55 dB
	Defog	Smart Defog
	WDR	140 dB
VIDEO	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 1920x1080, 1280x720 @ 50/60fps Sub Stream: 720P, D1, VGA, 640x360, CIF/QVGA @ 25/30fps Third Stream: VGA, CIF, QVGA @ 25/30fps SVC Stream: Support
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night
	White Balance	Auto, Daynight, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Supported
	ROI	Up to 8 Regions
	Privacy Mask	Supported

★Product specification and availability are subject to change without notice.


2MP BOX CAMERA



ENC-HBL50-00R-71

MODEL	Model No.	ENC-HBL50-00R-71
	Type	2MP BOX CAMERA
AUDIO	Audio Compression	G.711U, G.711A, RAW_PCM
	Audio Bit Rate	8 kbps , 16 kbps, 64 kbps
	Audio I/O	1/1
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Single & Double Virtual Fences
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Illegal Parking, Converse, Abnormal Speed, Signal Bad
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, IGMP, RTCP/RTP, RTSP, DHCP, NTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, 802.1x, QoS, SNMP
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1 / 1
	RS485	Supported
	CVBS Output	Supported
	Edge Storage	Micro SD card slot, up to 512 GB
	Max User	10
	Web Client	EyeGuard
GENERAL	Power Supply	12V DC/ 24V AC/ PoE (IEEE 802.3af)
	Max. Power Consumption	5 W
	Working Temperature	-30 °C ~ 55 °C
	Working Humidity	<90% RH
	Ingress Protection	IP66
	Reset Button	Supported
	Dimensions	150.2x75x69.7 mm
Net Weight	0.40 kg	

Dimension Unit : mm

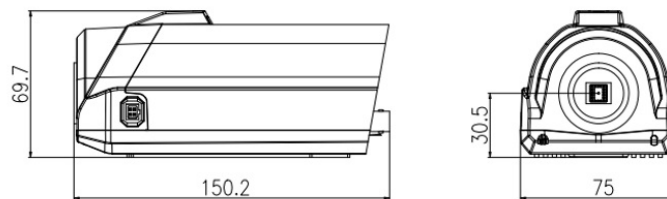

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBL50-00R-71	2MP 60fps H.265 Box Camera with PoE ,SD Card Slot, WDR, Smart Analytics and Built-in-Mic	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBL50-00R-71	Carton Box	-	-

★Product specification and availability are subject to change without notice.