

6 WAY UK SOCKET PDU WITH DETACHABLE C20 INPUT POWER SOCKET



NORDEN Power Distribution Units are designed and manufactured for cabinets. The product is equipped with sockets that meet various industrial systems and standards. Products can be customized according to the customer's specific requirements. This PDU comes with a detachable power cord. It is built to ensure reliable power distribution and safety in demanding environments. The robust design enables easy installation and delivers long-lasting performance across a variety of applications

*Product Picture for reference only

COMPLIANCE

EMC & safety: - EN 55022 Class A, EN 55024, EN 61000-3-2,
EN 61000-3-3, FCC Part 15 Class A,
ICES-003, PSE, VCCI Class A, VDE
Environmental: RoHS, REACH: Contains No SVHCs
Socket/Outlet Standard: BS1363

DESIGN & MATERIALS


Material of Construction	PC/ABS alloy, High Impact FR thermoplastic
Shell Material & Colour	Aluminium, black
Outlet Qty.	6 Way
Plug Type	Industrial plug
Power Input	C20 socket input
Power Input Style	Front end single input style
Power Cable Type	C19 Female plug - IEC 60309 Industrial Plug
Power Cable length	3m
Power Cable Specification	3 x 14 AWG x 3M
Bracket Installation Style	Frontal Installation Style
Control function	Switch
Commando Plug protection	IP44

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	16A 250VAC
Maximum load current available in	16A
Input frequency	50/60Hz
Maximum load capacity	4KW
Operating Environment	-5 °C to +45 °C
Operating Relative Humidity	5-95 %
Operating Elevation	0-3000 metres
Storage Temperature	-25 °C to +65 °C
Storage Relative Humidity	5-95 %
Storage Elevation	0-15000 meter

6 WAY UK SOCKET PDU WITH DETACHABLE C20 INPUT POWER SOCKET

DRAWING

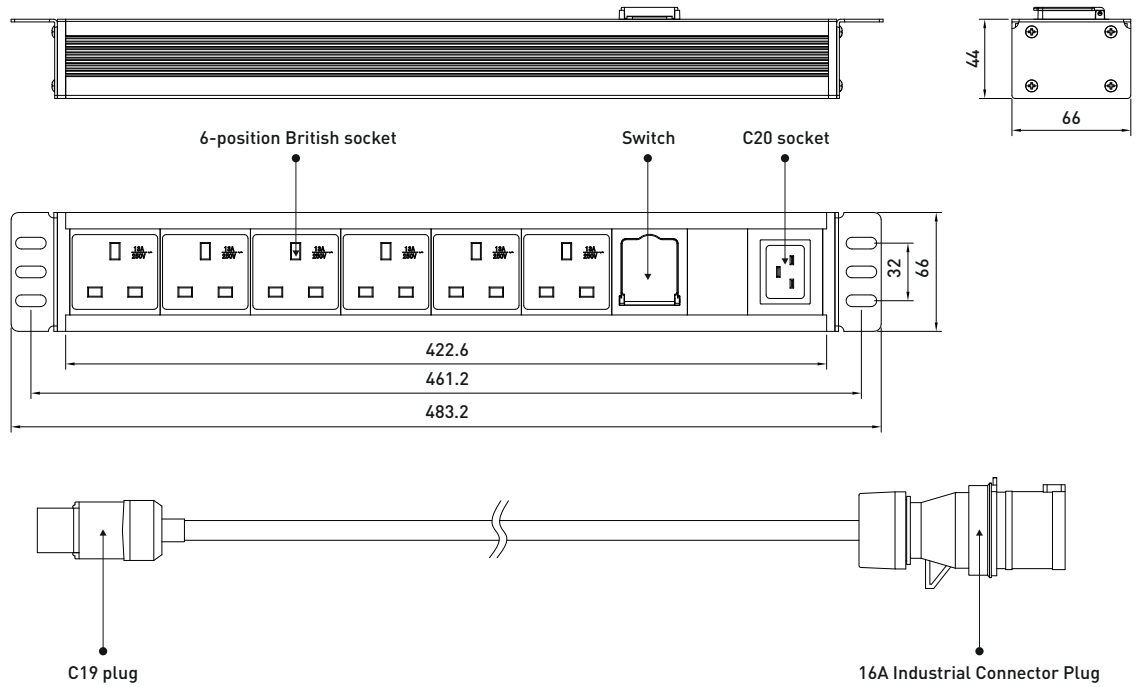

ORDERING INFORMATION

Part Number	Description
NC34-0106E06N00CX	6 way UK socket 13A PDU with detachable C20 Male Socket for input, including 3 meter C19 Female plug - IEC 60309 16A Industrial Plug

X: R1(RAL 9004)