

INTELLIGENT ADDRESSABLE MANUAL CALL POINT

The NFA-T01CP is an Addressable Manual Call Point using microprocessor technology. It enables the system to get the swift response from the call point to Fire Alarm Control Panel. The NFA-T01CP Manual Call Point uses a non-breakable glass. Applying light pressure on the Manual Call Point will trigger the alarm signal, and the built-in LED will turn on to steady light. Using the reset key and protected flap, the Manual Call Point can be reset. The NFA-T01CP Addressable Manual Call Point is produced in accordance with the EN 54-11 standard.




FEATURES & BENEFITS

- LPCB approved
- EN 54-11 :2001 + A1:2005 Certified
- Inbuilt microprocessor
- Digital addressing
- Non breakable glass with reset key
- Semi flush mounted and indoor application
- Safe to operate and easy to restart

TECHNICAL INFORMATION

Characteristic	Value
Listed	LPCB
Certified	EN 54-11 :2001 + A1:2005
Input Voltage	24V DC (16V to 28V)
Current Consumption	Stand by:0.6mA, Alarm:1.8mA
Addressing	Value ranges from 1 to 254
Alarm Mode	Push Button
Reset Option	Using special key
Indicator	Single LED/Steady ON when Pressed
Colour	Red glossy finishing
Material	Fire Proof ABS
Dimension/Height	89mm x 93 mm x 35 mm
Weight	102g (with base), 80 g (without base)
Operating Temperature	'-10° C to +50° C
Humidity	0 to 95% Relative humidity, Non condensing

INTELLIGENT ADDRESSABLE MANUAL CALL POINT

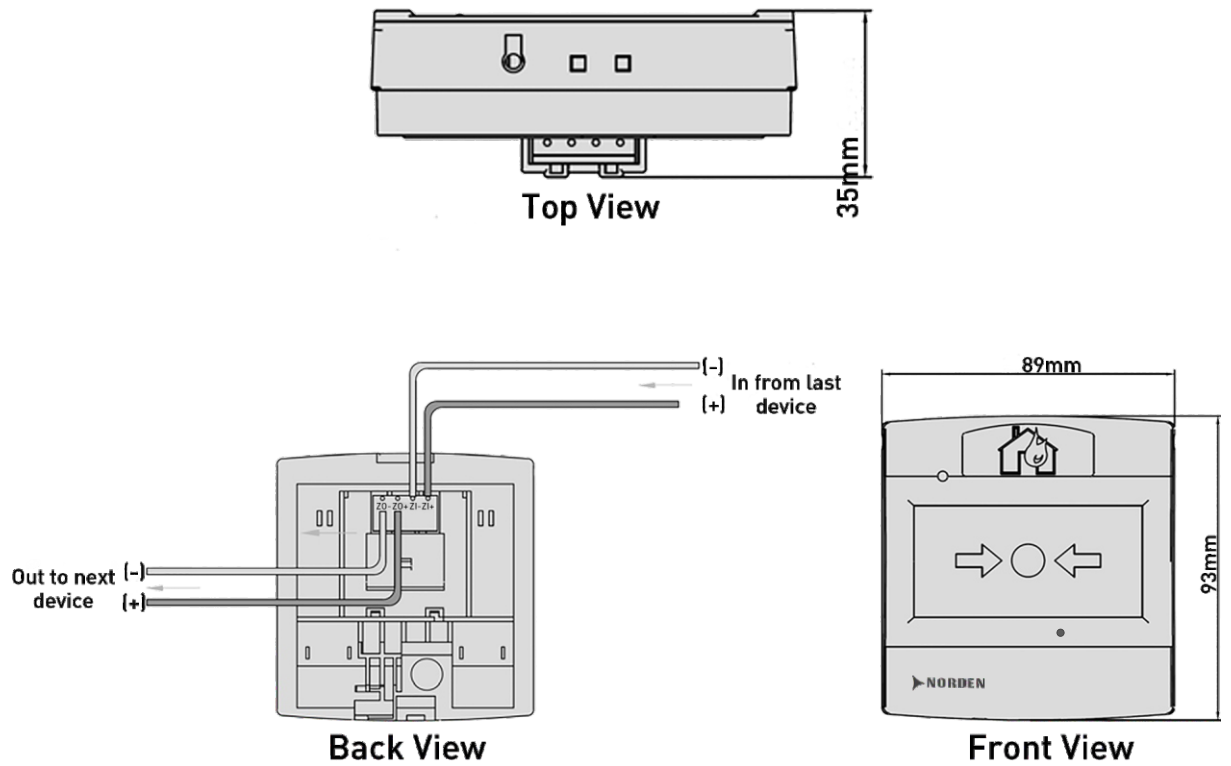

ORDERING INFORMATION

Part Number	Description
NFA-T01CP	LPCB Approved Addressable Manual Call Point. Resettable and non-breaking glass, EN 54-11 :2001 + A1:2005 Certified
NFA-T01FC	Optional Protective Flip Cover