


250W 6 Zones Mixer Amplifier with Audio Player and Timer Function

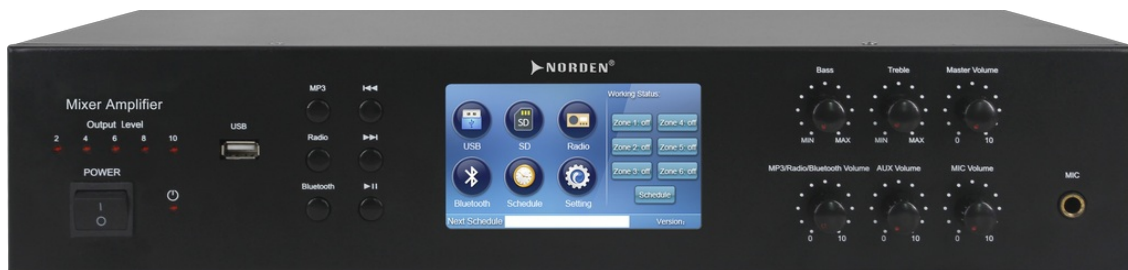

DESCRIPTION

The NVS-90070256MA integrated Mixer Amplifier is a 6-zone mix amplifier with built-in U disc, SD card, radio tuner, Bluetooth, zone, and timer functionality. It has a number of features, including the ability to play song files, a radio, set timers, and more. Touch screen control, all graphical interface, very simple and user-friendly operation. The product can be used broadly and can fulfil user requirements. It is equipped with built-in radio, it can be manually / automatically searched and can store up to 40 radio channels.

FEATURES

- ⊙ Touch and button-pressing control
- ⊙ Two kinds of control modes — schedule and manual
- ⊙ Mic input with muting priority
- ⊙ Separate volume control for MP3/FM/Bluetooth, AUX, Mic inputs
- ⊙ Support USB/SD/MP3/AM & FM/Bluetooth/schedule player
- ⊙ 1 AUX ,1 Mic input ,1 AUX output
- ⊙ Built-in 4G MP3 program memory
- ⊙ Built-in Bluetooth receiver module

Specifications	
Model	NVS-90070256MA
Rated Power	250W
Speaker Outputs	100V
Total Harmonic Distortion	<0.5% (1kHz , 1/3 rated power)
Auxiliary Output	100Ω, 1V(0dBV)
Input	Mic: 600Ω; 10mV (±10%)
	Line: 10kΩ, 300mV (±10%), unbalanced
Line Frequency Response	50Hz-18kHz (±3dB)
Microphone Frequency Response	40Hz-16kHz (±3dB)
Signal to Noise Ratio	Microphone: 70dB
	Line: 85dB
Tone	Bass: ±10dB (100Hz)
	Treble: ±10dB (10kHz)
Protection	AC fuse, DC output protection, overload protection.
Power Supply	AC220-240V/50-60Hz
Power Consumption	350W
Dimension	430x360x88mm


250W 6 Zones Mixer Amplifier with Audio Player and Timer Function

FRONT PANEL



- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Power switch 2. Power indicator 3. USB port 4. Often-used function selection buttons 5. Display screen 6. MP3/FM/Bluetooth volume control button | <ul style="list-style-type: none"> 7. Aux volume control button 8. Microphone volume control button 9. Microphone interface 10. Button for all volume together 11. Treble button 12. Bass button |
|--|--|

REAR PANEL

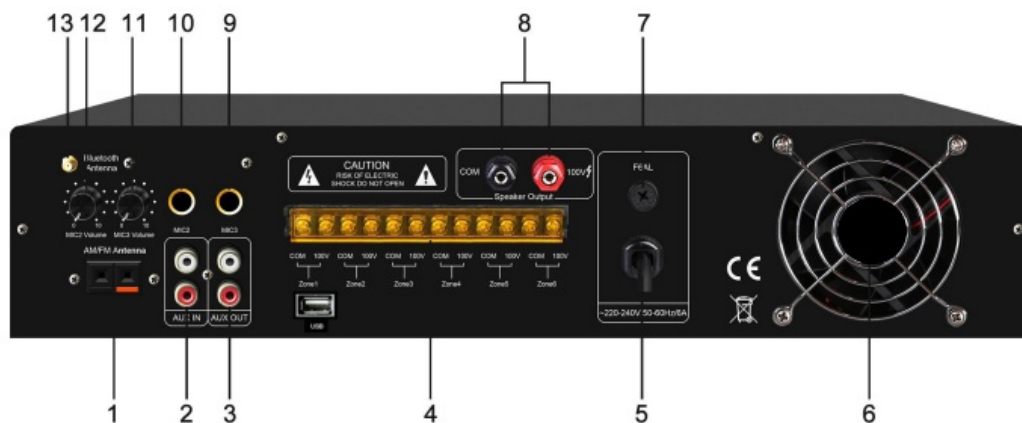

- | | |
|--|---|
| <ul style="list-style-type: none"> 1. AM/FM antenna 2. AUX IN 3. AUX OUT 4. Zone output terminal 5. Power cord 6. Fan cooling window 7. Fuse holder | <ul style="list-style-type: none"> 8. Speaker output terminal 9. MIC3 IN 10. MIC2 IN 11. MIC3 volume control 12. MIC2 volume control 13. Bluetooth antenna 14. USB on the rear panel |
|--|---|

250W 6 Zones Mixer Amplifier with Audio Player and Timer Function

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90070256MA	250W 6 Zones Mixer Amplifier with Audio Player and Timer Function	01

ACCESSORIES INFORMATION

Description	Standard Quantity
1.5m Audio Cable	01
FM/AM Antenna	01
Bluetooth Antenna	01
USB Flash Disk	01
User Manual	01
Warranty Card	01
Certificate	01