

Table Embedded Delegate Microphone



DESCRIPTION

The NVS-DC600122CM is a Table Embedded Delegate Microphone. It is a electret cardioid condenser microphone with gooseneck design and with windshield cover. The device has two color indicators; red indicates speaking, and green indicates applying to speak.

FEATURES

- ⊙ Conforms to IEC 60914 international standard
- ⊙ 3.5mm stereo earphone jack and the volume can be adjustable
- Every Mic with unique ID code
- With camera tracking function
- Support cascaded linkage, T shape linkage or + shape linkage
- ⊙ Connect with voting units via NVS-DC600157JB
- Convenient for use
- Mic pole detachable
- Embedded design
- Power supply from the host/extender


Specifications		
Model	NVS-DC600122CM	
Capsule Type	Electret Cardioid Condenser	
Speaker Power	1.5 W	
Frequency Response	45Hz-18kHz (-3dB)	
Signal to Noise Ratio	>80dB	
Sensitivity	45dBV/pa	
Total Harmonic Distortion	<0.5%	
Mic Frequency Response	40Hz-20kHz (-3dB)	
Mic Maximum SPL	125dB (THD<3%)	




Table Embedded Delegate Microphone

Earphone Output	9dBu, 8-32Ω, 3.5mm
Stand-by Power Consumption	<1 W
Maximum Power Consumption	2 W
Working Power	DC 24V
Weight (with Mic Pole)	0.55 Kg
Dimensions (without Mic Pole)	140x53mm

FRONT PANEL

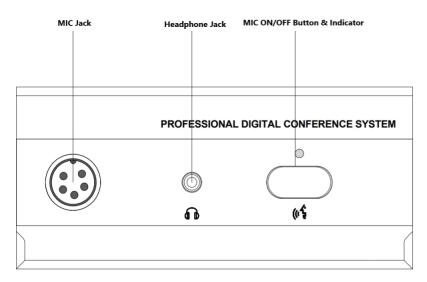

REAR PANEL



ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-DC600122CM	Table Embedded Delegate Microphone	01

ACCESSORIES INFORMATION

Description	Standard Quantity
Cross-shaped Connector	01
8-pin Cable(Male-Female)	01
Cross Recessed Half-round head screw bright black	08





Table Embedded Delegate Microphone

Chassis Accessory	04
Butterfly-shaped Screw	08
Microphone Cap	02