

# 4CH NETWORK VIDEO RECORDER



**ENR-01004-N-FPK**

## FEATURES

4 Channel input


Support Enhanced (H.265,H.264), H.265, H.264 Video Formats

1 SATA HDDs

HDMI & VGA Simultaneous Output

ONVIF Profile S

PoE Support

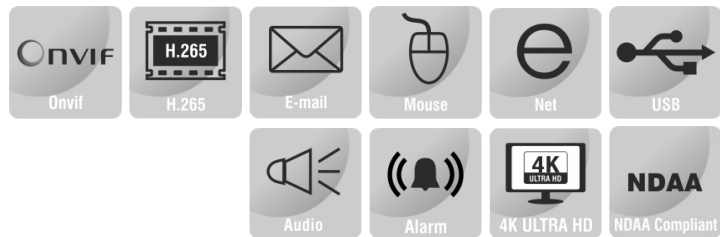

## SPECIFICATION

<b>MODEL</b>	Model No.	<b>ENR-01004-N-FPK</b>
	Type	4CH NETWORK VIDEO RECORDER
<b>VIDEO &amp; AUDIO</b>	Video Input	4-Ch
	Incoming Bandwidth	40 Mbps
	Outgoing Bandwidth	40 Mbps
	HDMI/VGA Output	HDMI: 3840×2160, 1920×1080, 1280×1024, 1024×768 VGA: 1920×1080, 1280×1024, 1024×768
	Audio I/O	1-ch Input/ 1-ch Output
	Two way Audio	Supported
	Multi-screen Display	1/4
	OSD Type	Channel Name, Date
<b>DECODING</b>	Video Compression	Enhanced (H.265,H.264), H.265, H.264
	Audio Compression	G.711A, G.711U
	Bit Rate Type	CBR, VBR
	Recording Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1
	Recording Mode	Manual, Schedule (Regular, Continuous), Event
	Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
	Simultaneous Live Decoding Capability	1x12MP, 4x4MP
<b>MONITORING</b>	Synchronous Playback	4/1
	Live View Functions	Snapshot, Record, Digital Zoom, Record, PTZ Toolbar, Volume Adjustment, Image Setting
	Playback functions	Sync Playback, Play, Pause, Stop, Fast play, Slow Play, Full Screen, Backup Selection, Snapshot, Search by Date, Picture Grid
	Search Mode	Time/Date, Alarm, Picture grid, Event
	Backup Mode	USB, Network
	Export Video Format	MP4
	Export Picture Format	JPG

★Product specification and availability are subject to change without notice.


# 4CH NETWORK VIDEO RECORDER



**ENR-01004-N-FPK**

<b>MODEL</b>	<b>Model No.</b>	<b>ENR-01004-N-FPK</b>
	Type	4CH NETWORK VIDEO RECORDER
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP/RTSP/RTCP, PPPoE, NTP, UPnP, QoS, SMTP, IGMP, 802.1X, NFS, Unicast, Multicast, ARP, SNMP, SSL, Telnet, SFTP (SSH), P2P, 3G/4G
	Compatibility	ONVIF Profile S, SDK / CGI
	Network	1xRJ45 (10/100 Mbps) Self Adaptive Ethernet Port
	Serial Interface	N/A
	HDMI Interface	1xHDMI
	VGA Interface	1xVGA
	USB Interface	3xUSB 2.0
	Alarm I/O	4/1
<b>PoE</b>	PoE Interface	4 RJ-45 (10M/100M) Self Adaptive Ethernet Port
	Max. Power for PoE Port	32W
<b>SMART</b>	Alarm Management	Input & Output event, Alarm I/O error, IP Conflict, Hard Disk Full, No Hard Disk, Hard Disk R/W Error, HDD SMART Check Error, Abnormal Recording, Motion Detection, Tampering (Masking), Smart Detection, Video Loss
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Analytics	Loitering, Multi Loitering, Abandoned object (Object Left), Missing object (Object Lost), People Counting, Wrong Way Detection, Abnormal Speed, Illegal Parking *Compatible with analytic supported cameras
<b>STORAGE</b>	SATA	1 SATA Interfaces
	Capacity	Up to 12TB for each HDD
	Array Type	N/A
	ANR	Supported
<b>GENERAL</b>	Operating System	Embedded Linux
	Remote Users	8
	Client Application	EyeGuard
	Power Supply	48V DC/1.25A
	Redundant Power	N/A
	Max. Power Consumption	≤15W (without HDD)
	Working Environment	-10°C ~ 55°C
	Chassis	1U
	Working Humidity	≤90% RH
	Reset Button	Supported
Dimension	255 × 235.1 × 47.5 mm	
Net Weight	0.9 Kg (without HDD)	

Dimension Unit : mm



## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-01004-N-FPK	4Ch Embedded Network Video Recorder with 1 HDD Bay Supports 4# PoE Ports, 4K Cameras, HDMI, VGA and ONVIF	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENR-01004-N-FPK	Carton Box	-	-

★Product specification and availability are subject to change without notice.